
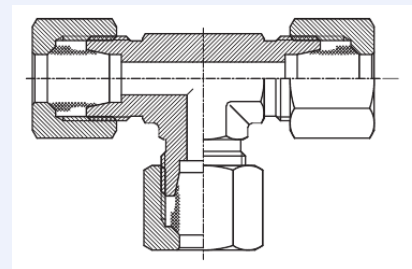



DIN 2353 | F-LINE

Hydraulic systems & fittings

Metric 24° tube connections

Product catalogue and dimensional reference

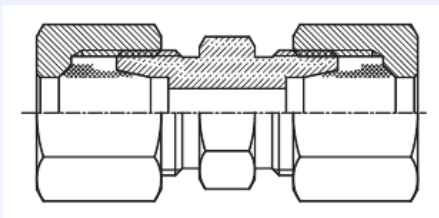

Specify the complete connection

Tube outside diameter • LL, L or S series • Port thread and seal • Material • Working conditions

For hydraulic tube connections, transitions, bulkhead arrangements, welding fittings, gauge connections and replacement components.

Reference illustrations show configuration and function. Actual dimensions and permissible operating conditions depend on the supplied item. Confirm the order-specific drawing and assembly instructions before installation.

Hydraulic tube connections

fluidline.co.za | ram@fluidline.co.za | +27 11 312 9339

QUICK NAVIGATION

Inside this catalogue

Start with the selection guidance, use the illustrated selector to identify the configuration, then consult the reference tables. PDF bookmarks provide direct navigation to each dimensional family.


Section	Page
How a DIN 2353 connection works	3
Tube outside diameter & union thread	4
Materials, seals & pressure selection	5
Port threads, sealing forms & transitions	6
Assembly, inspection & maintenance	7
Tube-to-Tube Fittings	8
Tube-to-Thread Fittings	10
Adjustable Fittings	12
Welding Fittings	14
Gauge & Instrument Connections	15
Adaptors & Port Fittings	16
Spare Components	18
Ordering & enquiry checklist	19
Dimensional reference	20
Straight union	21
Your connection, fully specified	84

The dimensional reference covers unions, tube-to-port connectors, adjustable fittings, reducers, gauges, welding fittings, nuts, banjos, adaptors and plugs. No table row is an assigned order code.

SELECTION FUNDAMENTALS

How a DIN 2353 connection works

A conventional cutting-ring connection consists of the body, tube nut and cutting ring. The tube enters the body and rests against its internal stop. During the prescribed assembly operation, the ring engages the tube to provide retention and sealing at the designed surfaces.

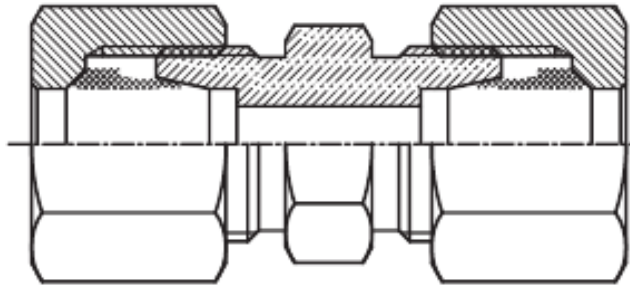

Conceptual cutaway of an assembled tube-to-tube connection. Not a manufacturing drawing.

Identify four things at each connection

- Tube OD and wall thickness: measure the outside diameter in millimetres and record wall thickness.
- Series: LL, L or S. The same tube size can use different union threads in different series.
- Connection interface: a DIN tube end is different from the equipment port on a male connector.
- Sealing system: cutting ring, cone seal, ED profile seal or O-ring must match the specified interface.

Series describes geometry, not one pressure rating

LL covers the very light family, L the light family and S the heavy family. The selection scope is LL 4-12 mm, L 6-42 mm and S 6-38 mm; availability varies by configuration and supplied range. A matching thread is not enough to prove compatibility.

DIN 2353 is the fitting designation used throughout this catalogue. The 24° metric tube interface is also addressed by ISO 8434-1. A standard reference is not, by itself, a certificate or an item-specific pressure rating.

DIMENSIONAL IDENTIFICATION

Tube outside diameter & union thread

Use this chart for the tube-end union connection. It is not a chart of equipment-port threads. Identify OD and series together, then confirm the seat and sealing arrangement.

Series	Tube OD (mm)	Union thread
LL	4	M8 x 1
LL	6	M10 x 1
LL	8	M12 x 1
LL	10	M14 x 1
LL	12	M16 x 1
L	6	M12 x 1.5
L	8	M14 x 1.5
L	10	M16 x 1.5
L	12	M18 x 1.5
L	15	M22 x 1.5
L	18	M26 x 1.5
L	22	M30 x 2
L	28	M36 x 2
L	35	M45 x 2
L	42	M52 x 2
S	6	M14 x 1.5
S	8	M16 x 1.5
S	10	M18 x 1.5
S	12	M20 x 1.5
S	14	M22 x 1.5
S	16	M24 x 1.5
S	20	M30 x 2
S	25	M36 x 2
S	30	M42 x 2
S	38	M52 x 2

LL 10 and 12 mm are within the reference scope; confirm that the required configuration is supplied. Sizes that share a thread can still have different tube diameters or series.

Examples: 8L and 6S share M14 x 1.5. 22L and 20S share M30 x 2. Thread fit alone is not a selection check.

APPLICATION SELECTION

Materials, seals & pressure selection

Select the whole assembly

Provide the fluid, normal working pressure, maximum pressure including peaks, and the full operating temperature range. Include pressure cycling, vibration, environmental exposure and cleaning media where relevant.

Material option for enquiry	Selection considerations
Carbon steel	Hydraulic duty; confirm surface protection and environment.
316L stainless steel	Confirm grade, medium, tube and supplied configuration.
316Ti stainless steel	Different grade from 316L; specify it explicitly.

These materials can be specified in an enquiry; availability and suitability must be confirmed for the item. Stainless steel does not automatically carry a higher pressure rating than carbon steel.

Pressure is specific to the selected item

- Verify the rating for the configuration, size, material and operating temperature.
- Include the tube, wall thickness, port and seals in the selection. The most restrictive applicable limit governs.
- Account for pressure peaks, repeated cycling and mechanical loads. Do not use burst or test pressure as working pressure.
- Request any required temperature derating and confirm seal compatibility with the fluid.

Seals and tubing

NBR and FKM/FPM have different fluid and temperature characteristics. Specify seal profile, dimensions, material and hardness where required. Tube OD alone is insufficient: wall thickness, tolerances, hardness and end condition also affect suitability. Thin-wall or softer tube may require an approved support sleeve.

No blanket pressure or temperature rating is assigned to the complete catalogue range. Obtain the permissible values and documentation for the exact assembly being ordered.

CONNECTION SELECTION

Port threads, sealing forms & transitions

Connection	What to confirm
BSP parallel (BSPP / G)	Thread size; sealing face; washer, ED or O-ring arrangement.
BSP tapered (BSPT / R)	Mating taper thread; sealing method for the service.
Metric parallel	Diameter and pitch; port form and specified seal.
Metric tapered	Taper specification and matching port; do not assume parallel.
NPT	Correct NPT size; do not interchange with BSP taper.
UN/UNF O-ring boss	Thread size and boss/groove geometry; correct O-ring.
JIC 37° transition	37° flare interface and unified thread; distinct from DIN 24°.

A male connector has two different ends

Specify the tube-end OD and LL/L/S series separately from the equipment-port thread. For example, the tube union thread in the size chart does not establish which BSP, metric, NPT or unified port is needed.

O-ring and ED profile seals

An O-ring seals in its designed groove or boss arrangement. An ED profile ring seals at its specified port face. These are not interchangeable generic rings. Match the profile and material to the connection and medium. Thread sealant cannot replace a missing or damaged seal.

Supplementary transition options

For systems that include 37° flare connections, request a DIN 24°-to-JIC 37° transition with both ends fully specified. For a unified straight-thread equipment port, request the correct O-ring boss arrangement. A unified thread alone does not tell you whether the seal is a 37° cone or an O-ring boss.

Transition options are subject to enquiry and configuration confirmation. Identify whether the quoted item is a complete assembly with nuts and cutting rings or a body only. Do not combine parts solely because the threads engage.

INSTALLATION OVERVIEW

Assembly, inspection & maintenance

1. Isolate and identify

Release stored pressure using the equipment procedure before opening a connection. Check tube OD, wall, material, series and the complete component combination.

2. Prepare the tube

Cut square with the specified equipment, deburr inside and outside, and remove chips. Check tube roundness, straight length near bends and required support sleeves.

3. Assemble the specified system

Use matched bodies, nuts, rings and seals. Keep the tube against the prescribed stop. Use the specified preassembly method, tools and lubrication; stainless steel and other variants can have different requirements.

4. Inspect and complete

Apply the supplied inspection criteria for the ring and tube end. Complete final assembly while supporting the body as instructed. There is no universal torque or turn count for every DIN 2353 system.

5. Support and commission

Route and clamp the tube without forcing misalignment. Check clearance and cleanliness. Commission according to the equipment procedure and keep hands away from suspected pressurised leaks.

6. Maintain and reassemble


Depressurise before correction. Inspect all dismantled parts and replace damaged components or seals. Preserve matched assemblies where required and follow the specific reassembly instructions.

Use the supplied installation procedure for the exact fitting system. This overview supports planning and does not replace item-specific assembly instructions. Obtain written compatibility confirmation before intermixing components.

CONFIGURATION SELECTOR


Tube-to-Tube Fittings

Illustrations are reference configurations. Specify sizes, series, materials and each end connection. Availability is confirmed by item.




Straight unions

Connect two equal tube ends in line. State tube OD and series on both sides.




Union elbows

Turn equal tube connections through 90°. Check bend clearance and access for assembly.




Union tees

Join three equal tube connections. Mark the run and branch on the enquiry sketch.



Union crosses

Join four tube connections. Confirm each port and available installation space.




Reducing unions

Connect unequal tube diameters. Specify both tube sizes and their series.

CONFIGURATION SELECTOR


Tube-to-Tube Fittings - continued

Illustrations are reference configurations. Specify sizes, series, materials and each end connection. Availability is confirmed by item.




Reducing tees

Combine different run or branch sizes. Identify all three ports on a sketch.




Bulkhead unions

Pass a tube connection through a panel. Confirm panel thickness and mounting clearance.



Weld bulkhead unions

Provide a weldable bulkhead connection. Confirm weld preparation and required material.




Bulkhead union elbows

Combine a bulkhead mounting connection and a 90° tube outlet.


CONFIGURATION SELECTOR

Tube-to-Thread Fittings


Illustrations are reference configurations. Specify sizes, series, materials and each end connection. Availability is confirmed by item.

**BSPP male connectors**


Connect tube to a parallel BSP port. Specify the port size and sealing form.

**BSPT male connectors**


Connect tube to a tapered BSP port. Confirm mating thread and sealing requirements.

**NPT male connectors**

Connect tube to a tapered NPT port. Do not substitute a BSP thread.

**Metric male connectors**

Connect tube to a metric port. State thread diameter, pitch and sealing form.


**UNF male connectors**

Connect tube to a unified-thread port. Confirm thread size and O-ring boss geometry.


CONFIGURATION SELECTOR

Tube-to-Thread Fittings - continued


Illustrations are reference configurations. Specify sizes, series, materials and each end connection. Availability is confirmed by item.

**Male connectors with O-ring**


Use the specified O-ring at the port connection. Match seal material to the medium.

**Male connectors with ED-ring**

Use the specified profile seal on a parallel port connection. Confirm groove and seal size.

**Female connectors**

Connect a tube end to a female-thread port. Specify thread and mating seal arrangement.


**Male elbows**

Turn from tube to a male-thread port. Confirm orientation, port thread and sealing form.

CONFIGURATION SELECTOR


Adjustable Fittings

Illustrations are reference configurations. Specify sizes, series, materials and each end connection. Availability is confirmed by item.




Adjustable elbows with standpipe

Position a 90° connection using a standpipe end and matching tube fitting.




Adjustable branch tees

Use a standpipe connection at the tee branch. Identify all three ports.




Adjustable run tees

Use a standpipe connection at one run of the tee. Identify all three ports.



Swivel adjustable elbows

Orient an elbow through its swivel cone connection before final assembly.




Swivel branch tees

Provide a swivel connection at the tee branch. Confirm cone and seal details.

CONFIGURATION SELECTOR


Adjustable Fittings - continued

Illustrations are reference configurations. Specify sizes, series, materials and each end connection. Availability is confirmed by item.




Swivel run tees

Provide a swivel connection at one run of the tee. Confirm the required orientation.




Swivel unions

Connect mating cone interfaces with a swivel arrangement. Confirm series and seals.




Swivel adaptors

Connect a swivel tube interface to a port. Specify both connection ends.



Reducing adaptors

Transition between unequal connection sizes. State each end type, size and series.




Standpipe reducers

Reduce a tube connection using a standpipe end. Match the receiving connection.

CONFIGURATION SELECTOR


Welding Fittings

Illustrations are reference configurations. Specify sizes, series, materials and each end connection. Availability is confirmed by item.




Welding connectors

Join a tube fitting to a weldable connection. Confirm material and weld preparation.




Welding connectors with nipple

Use a connector and welding nipple assembly. Specify the complete required arrangement.



Welding nipples

Provide a weldable nipple for the matching connection. Confirm seal and material.



Reducing welding nipples

Change size through a welding nipple. Specify both tube and weld-end dimensions.




Weld bulkhead connections

Provide a weldable passage through a bulkhead. Confirm mounting and weld details.

CONFIGURATION SELECTOR


Gauge & Instrument Connections

Illustrations are reference configurations. Specify sizes, series, materials and each end connection. Availability is confirmed by item.




Pressure gauge connectors

Connect a pressure gauge to the hydraulic tube line. Check gauge thread and seal.




Gauge connectors with standpipe

Connect a gauge through a standpipe arrangement. Confirm line and gauge connections.




Swivel gauge adaptors

Orient a gauge using a swivel connection. Match the gauge seat and sealing ring.



Test couplings

Provide a diagnostic connection. Match the test hose interface and operating conditions.




Tee test couplings

Provide an inline tee with a diagnostic connection. State both tube ends and test interface.

CONFIGURATION SELECTOR


Adaptors & Port Fittings

Illustrations are reference configurations. Specify sizes, series, materials and each end connection. Availability is confirmed by item.




Male-to-female adaptors

Change between male and female port connections. Specify both sizes and sealing forms.




BSPP adaptors

Adapt a parallel BSP port connection. Confirm the seat and required sealing component.




Metric adaptors

Adapt a metric port connection. State diameter, pitch and sealing form on each end.



ED-ring adaptors

Use profile seals at the designated port interface. Confirm the correct seal specification.




Blanking plugs

Close a compatible tube-fitting connection. Match the series, size and sealing design.

CONFIGURATION SELECTOR


Adaptors & Port Fittings - continued

Illustrations are reference configurations. Specify sizes, series, materials and each end connection. Availability is confirmed by item.



Port plugs

Close an equipment port with the specified ED or O-ring seal. Confirm thread and port form.




Tube caps

Close a tube end using the appropriate fitting connection and components.

CONFIGURATION SELECTOR


Spare Components

Illustrations are reference configurations. Specify sizes, series, materials and each end connection. Availability is confirmed by item.



Tube nuts

Match nut thread and series to the fitting body and tube size. Supply as a confirmed component.



Cutting rings

Match ring geometry, size and material to the approved fitting system and tubing.



ED seals

Replace by exact profile, dimensions and material. A generic ring is not an equivalent.



O-rings

Specify inside diameter, cross-section, material and hardness for the correct groove.



Sealing rings

Match the ring to its gauge or banjo sealing application and contact surfaces.

Seal sketches indicate component type only. Confirm the exact profile, dimensions, material and hardness; request item-specific images where needed.

SPECIFY YOUR REQUIREMENT

Ordering & enquiry checklist

Send a drawing, marked photograph or connection sketch with the details below. For tees and crosses, label every port so that run and branch sizes cannot be confused.

Enquiry field	Details to provide
Configuration	Straight / elbow / tee / cross / bulkhead / adaptor / other
Tube connection(s)	OD, wall thickness, material and LL / L / S series
Equipment port(s)	Thread type, size, pitch and sealing form at each end
Material and seals	Required grade, surface finish and seal material
Operating duty	Fluid; working and peak pressure; temperature range
Installation	Vibration, environment, clearance, panel or weld details
Scope of supply	Complete with nut/ring, body only, or identified spare
Quantity and documents	Quantity; required drawings or supporting documentation

Example enquiry

Straight tube union, 12 mm OD, L series, complete with matching nuts and cutting rings. Confirm material, tube-wall suitability, working conditions and dimensional drawing against the attached line specification. Quantity: state required amount.

Before the order is released

- Confirm each connection, material and scope of supply on the quotation.
- Review the item-specific drawing and permissible operating conditions.
- Confirm the installation method and any special tools or spare seals.

Enquiries: ram@fluidline.co.za

Telephone: +27 11 312 9339

Website: fluidline.co.za

REFERENCE TABLES

Dimensional reference

The following tables provide configuration-level reference dimensions for selection and enquiry. All linear values are millimetres unless the column identifies a thread or seal designation. The approved drawing for the supplied item governs procurement, installation and fabrication.

How to read the tables

Notation	Meaning / use
Tube OD / D1, D2, D3	Tube outside diameters or drawing-designated diameters.
Series	LL, L or S; multiple entries follow the connection sequence.
T, T1, M	Thread designations; identify which end each refers to.
H, H1, H2, H3, h	Across-flats or drawing-designated hexagon dimensions.
L, L1, L2, L3	Overall or drawing-designated lengths.
l, l1, l2, l3	Drawing-designated engagement, effective or local lengths.
d, d1, d2, D, DN, t, i	Other dimensions as shown on the item-specific drawing.
Dash (-)	Value not provided; do not infer from another row.

Dimension letters refer to the labelled drawing alongside each table. Drawings are not to scale. Lower-case l in a table corresponds to the script-style length symbol in the drawing. Confirm the order-specific drawing before using reference values for a layout or fabricated part.

Selection controls


- No universal pressure rating is assigned to the reference rows.
- Unresolved dimensions and rows are omitted rather than replaced with estimated values.
- No ordering SKU is implied by a table row. Order by confirmed configuration and connection details.
- Variants with different materials or seals may differ; confirm against the proposed supply.

Male elbows and certain swivel reducing configurations are illustrated in the selector; dimensional drawings for those variants are available for enquiry. The reference tables deliberately exclude unresolved dimension sets.

DIMENSIONAL REFERENCE

Straight union

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

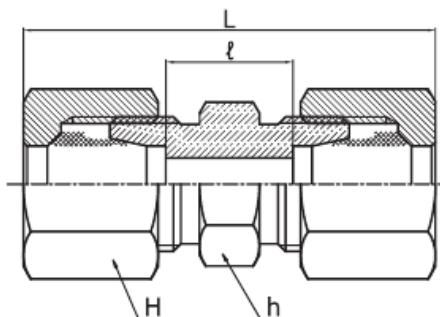

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	H	h	L	l
LL	4	10	9	31	12
LL	6	12	11	32	9
LL	8	14	12	35	12
LL	10	17	14	35	12
LL	12	19	17	35	11
L	6	14	12	39	10
L	8	17	14	40	11
L	10	19	17	42	13
L	12	22	19	43	14
L	15	27	24	46	16
L	18	32	27	48	16
L	22	36	32	52	20
L	28	41	41	54	21
L	35	50	46	63	20
L	42	60	55	66	21
S	6	17	14	45	16
S	8	19	17	47	18
S	10	22	19	49	17
S	12	24	22	51	19
S	14	27	24	57	22
S	16	30	27	57	21
S	20	36	32	66	23
S	25	46	41	74	26
S	30	50	46	80	27
S	38	60	55	90	29

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

Union elbow

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.



Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	H	h	L	l
LL	4	10	9	21	11
LL	6	12	9	21	9.5
LL	8	14	12	23	11.5
LL	10	17	14	24	12.5
LL	12	19	17	25	13
L	6	14	12	27	12
L	8	17	12	29	14
L	10	19	14	30	15
L	12	22	17	32	17
L	15	27	19	36	21
L	18	32	24	40	23.5
L	22	36	27	44	27.5
L	28	41	36	47	30.5
L	35	50	41	56	34.5
L	42	60	50	63	40
S	6	17	12	31	16
S	8	19	14	32	17
S	10	22	17	34	17.5
S	12	24	17	38	21.5
S	14	27	19	40	22
S	16	30	24	43	24.5
S	20	36	27	48	26.5
S	25	46	36	54	30
S	30	50	41	62	35.5
S	38	60	50	72	41

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

Reducing union

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

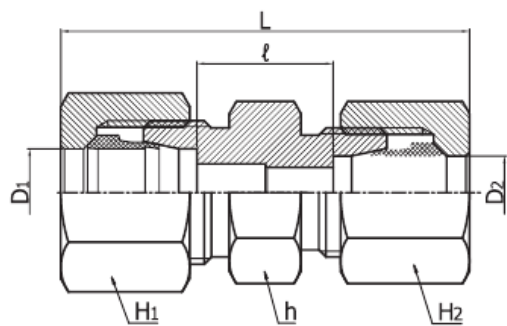

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	D1	D2	H2	h	L	l
L	8	6	14	14	40	11
L	10	6	14	17	41	12
L	10	8	17	17	41	12
L	12	6	14	19	42	13
L	12	8	17	19	42	13
L	12	10	19	19	43	14
L	15	10	19	24	45	15
L	15	12	22	24	45	15
L	18	10	19	27	46	15.5
L	18	12	22	27	46	15.5
L	18	15	27	27	48	16.5
L	22	12	22	32	48	17.5
L	22	15	27	32	50	18.5
L	22	18	32	32	50	18
L	28	18	32	41	52	19
L	28	22	36	41	54	21
L	35	22	36	46	59	21
L	35	28	41	46	59	21

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

Reducing union - continued

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

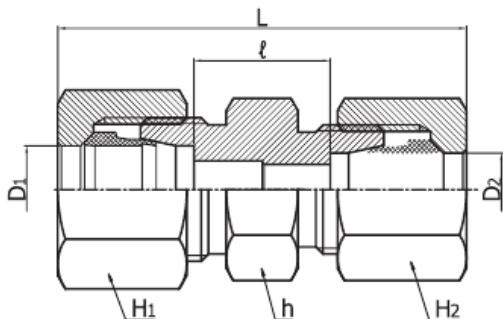

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	D1	D2	H2	h	L	l
S	8	6	17	17	47	18
S	10	6	17	19	48	17.5
S	10	8	19	19	48	17.5
S	12	6	17	22	50	19.5
S	12	8	19	22	50	19.5
S	12	10	22	22	51	19
S	14	10	22	24	54	20.5
S	14	12	24	24	54	20.5
S	16	12	24	27	54	20
S	16	14	27	27	57	21.5
S	20	10	22	32	60	22
S	20	12	24	32	60	22
S	20	16	30	32	63	23
S	25	16	30	41	68	25
S	25	20	36	41	71	25.5
S	30	20	36	46	74	26
S	30	25	46	46	77	26.5
S	38	30	50	55	87	29.5

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

Union tee

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

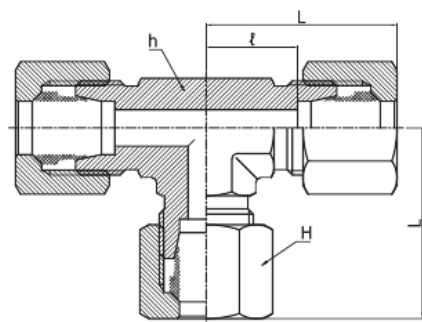

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	H	h	L	l
LL	4	10	9	21	11
LL	6	12	9	21	9.5
LL	8	14	12	23	11.5
LL	10	17	14	24	12.5
LL	12	19	14	27	15
L	6	14	12	27	12
L	8	17	12	29	14
L	10	19	14	30	15
L	12	22	17	32	17
L	15	27	19	36	21
L	18	32	24	40	23.5
L	22	36	27	44	27.5
L	28	41	36	47	30.5
L	35	50	41	56	34.5
L	42	60	50	63	40
S	6	17	12	31	16
S	8	19	14	32	17
S	10	22	17	34	17.5
S	12	24	17	38	21.5
S	14	27	19	40	22
S	16	30	24	43	24.5
S	20	36	27	48	26.5
S	25	46	36	54	30
S	30	50	41	62	35.5
S	38	60	50	72	41

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

Union cross

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.



Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	H	h	L	I
LL	4	10	9	21	11
LL	6	12	9	21	9.5
LL	8	14	12	23	11.5
LL	10	17	14	24	12.5
LL	12	19	14	27	15
L	6	14	12	27	12
L	8	17	12	29	14
L	10	19	14	30	15
L	12	22	17	32	17
L	15	27	19	36	21
L	18	32	24	40	23.5
L	22	36	27	44	27.5
L	28	41	36	47	30.5
L	35	50	41	56	34.5
L	42	60	50	63	40
S	6	17	12	31	16
S	8	19	14	32	17
S	10	22	17	34	17.5
S	12	24	17	38	21.5
S	14	27	19	40	22
S	16	30	24	43	24.5
S	20	36	27	48	26.5
S	25	46	36	54	30
S	30	50	41	62	35.5
S	38	60	50	72	41

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

Reducing tee

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

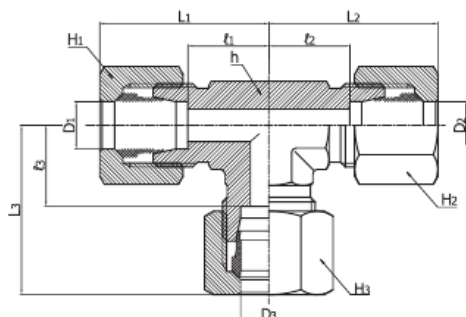

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	D1	D2	D3	H1	H2	H3	h	L1	L2	L3	I1	I2	I3
L	6	6	8	14	14	17	14	29	29	29	14	14	14
L	8	8	6	17	17	14	14	29	29	29	14	14	14
L	6	6	10	14	14	19	14	30	30	30	15	15	15
L	8	8	10	17	17	19	14	30	30	30	15	15	15
L	10	10	6	19	19	14	14	30	30	30	15	15	15
L	10	10	8	19	19	17	14	30	30	30	15	15	15
L	10	6	10	19	14	19	14	30	30	30	15	15	15
L	8	8	12	17	17	22	17	32	32	32	17	17	17
L	12	12	6	22	22	14	17	32	32	32	17	17	17
L	12	12	8	22	22	17	17	32	32	32	17	17	17
L	12	10	10	22	19	19	17	32	32	32	17	17	17
L	12	12	10	22	22	19	17	32	32	32	17	17	17
L	12	10	12	22	19	22	17	32	32	32	17	17	17
L	10	10	15	19	19	27	19	36	36	36	21	21	21
L	12	12	15	22	22	27	19	36	36	36	21	21	21
L	15	15	6	27	27	14	19	36	36	36	21	21	21
L	15	15	10	27	27	19	19	36	36	36	21	21	21
L	15	15	12	27	27	22	19	36	36	36	21	21	21
L	15	12	15	27	22	27	19	36	36	36	21	21	21
L	12	12	18	22	22	32	24	39	39	40	24	24	23.5
L	18	10	10	32	19	19	24	40	39	39	23.5	24	24
L	18	18	10	32	32	19	24	40	40	39	23.5	23.5	24
L	18	18	12	32	32	22	24	40	40	39	23.5	23.5	24
L	18	18	15	32	32	27	24	40	40	39	23.5	23.5	24
L	18	10	18	32	19	32	24	40	39	40	23.5	24	23.5
L	22	22	10	36	36	19	27	44	44	43	27.5	27.5	28
L	22	22	12	36	36	22	27	44	44	43	27.5	27.5	28
L	22	15	15	36	27	27	27	44	43	43	27.5	28	28

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

Reducing tee - continued

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

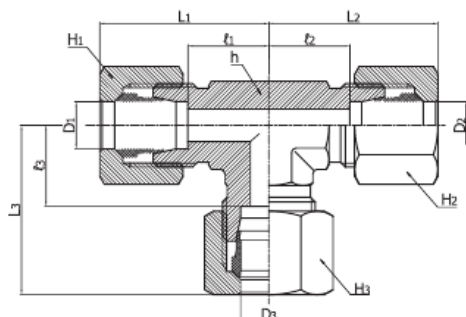


Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.

Series	D1	D2	D3	H1	H2	H3	h	L1	L2	L3	I1	I2	I3
L	22	22	15	36	36	27	27	44	44	43	27.5	27.5	28
L	22	18	18	36	32	32	27	44	44	44	27.5	27.5	27.5
L	22	22	18	36	36	32	27	44	44	44	27.5	27.5	27.5
L	22	18	22	36	32	36	27	44	44	44	27.5	27.5	27.5
L	28	28	10	41	41	19	36	47	44	46	30.5	30.5	31
L	28	28	12	41	41	22	36	47	47	46	30.5	30.5	31
L	28	28	15	41	41	27	36	47	47	46	30.5	30.5	31
L	28	28	18	41	41	32	36	47	47	47	30.5	30.5	30.5
L	28	22	22	41	36	36	36	47	47	47	30.5	30.5	30.5
L	28	28	22	41	41	36	36	47	47	47	30.5	30.5	30.5
S	10	10	6	22	22	17	17	34	34	33	17.5	17.5	18
S	12	8	8	24	19	19	17	38	37	37	21.5	22	22
S	12	12	8	24	24	19	17	38	38	37	21.5	21.5	22
S	12	12	10	24	24	22	17	38	38	38	21.5	21.5	21.5
S	12	12	16	24	24	30	24	42	42	43	25.5	25.5	24.5
S	16	16	6	30	30	17	24	43	43	41	24.5	24.5	26
S	16	16	8	30	30	19	24	43	43	41	24.5	24.5	26
S	16	16	10	30	30	22	24	43	43	42	24.5	24.5	25.5
S	16	16	12	30	30	24	24	43	43	42	24.5	24.5	25.5
S	16	16	20	30	30	36	27	47	47	48	28.5	28.5	26.5
S	20	20	10	36	36	22	27	48	48	46	26.5	26.5	29.5
S	20	20	12	36	36	24	27	48	48	46	26.5	26.5	29.5
S	20	20	16	36	36	30	27	48	48	47	26.5	26.5	28.5
S	20	20	25	36	36	46	36	53	53	54	31.5	31.5	30
S	25	25	16	46	46	30	36	54	54	52	30	30	33.5
S	25	25	20	46	46	36	36	54	54	53	30	30	31.5
S	25	25	30	46	46	50	41	61	61	62	37	37	35.5

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

Bulkhead union

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

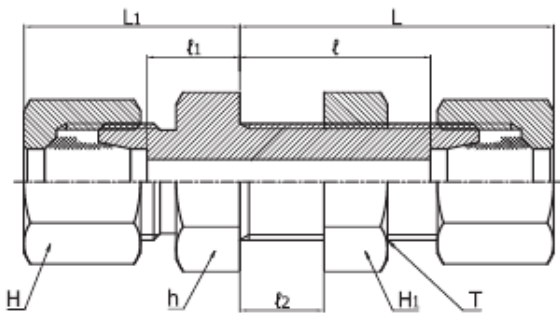

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	H	H1	h	L	L1	I	I1	T
L	6	14	17	17	42	22	27	7	M12 × 1.5
L	8	17	19	19	42	23	27	8	M14 × 1.5
L	10	19	22	22	43	25	28	10	M16 × 1.5
L	12	22	24	24	44	25	29	10	M18 × 1.5
L	15	27	30	27	46	27	31	12	M22 × 1.5
L	18	32	36	32	49	30	32.5	13.5	M26 × 1.5
L	22	36	41	36	51	33	34.5	16.5	M30 × 2
L	28	41	46	41	52	35	35.5	18.5	M36 × 2
L	35	50	55	50	58	40	36.5	18.5	M45 × 2
L	42	60	65	60	59	42	36	19	M52 × 2
S	6	17	19	19	44	27	29	12	M14 × 1.5
S	8	19	22	22	44	28	29	13	M16 × 1.5
S	10	22	24	24	46	31	29.5	14.5	M18 × 1.5
S	12	24	27	27	47	31	30.5	14.5	M20 × 1.5
S	14	27	30	30	50	35	32	17	M22 × 1.5
S	16	30	32	32	50	35	31.5	16.5	M24 × 1.5
S	20	36	41	41	55	39	33.5	17.5	M30 × 2
S	25	46	46	46	59	44	35	20	M36 × 2
S	30	50	50	50	64	48	37.5	21.5	M42 × 2
S	38	60	65	65	68	53	37	22	M52 × 2

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

Welding bulkhead union

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

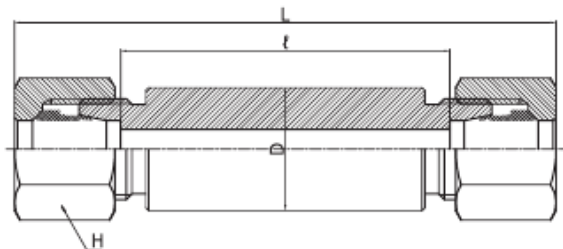

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	H	D	L	I
L	6	18	14	85	56
L	8	20	17	85	56
L	10	22	19	87	58
L	12	25	22	87	58
L	15	28	27	100	70
L	18	32	32	101	69
L	22	36	36	105	73
L	28	40	41	106	73
L	35	50	50	114	71
L	42	60	60	115	70
S	6	20	17	89	60
S	8	22	19	89	60
S	10	25	22	91	59
S	12	28	24	91	59
S	14	30	27	107	72
S	16	35	30	107	71
S	20	38	36	114	71
S	25	45	46	120	72
S	30	50	50	126	73
S	38	60	60	133	72

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

Bulkhead union elbow

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

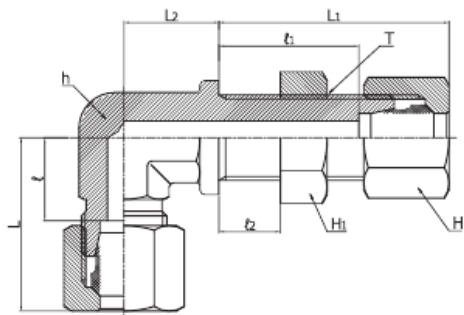

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	H	H1	h	L	L1	L2	I	I1	T
L	6	14	17	12	27	42	14	12	27	M12 × 1.5
L	8	17	19	12	29	42	17	14	27	M14 × 1.5
L	10	19	22	14	30	43	18	15	28	M16 × 1.5
L	12	22	24	17	32	44	20	17	29	M18 × 1.5
L	15	27	30	19	36	46	23	21	31	M22 × 1.5
L	18	32	36	24	40	49	24	23.5	32.5	M26 × 1.5
L	22	36	41	27	44	51	30	27.5	34.5	M30 × 2
L	28	41	46	36	47	52	34	30.5	35.5	M36 × 2
L	35	50	55	41	56	58	39	34.5	36.5	M45 × 2
L	42	60	65	50	63	59	43	40	36	M52 × 2
S	6	17	19	12	31	44	17	16	29	M14 × 1.5
S	8	19	22	14	32	44	18	17	29	M16 × 1.5
S	10	22	24	17	34	46	20	17.5	29.5	M18 × 1.5
S	12	24	27	17	38	47	21	21.5	30.5	M20 × 1.5
S	14	27	30	19	40	50	23	22	32	M22 × 1.5
S	16	30	32	24	43	50	24	24.5	31.5	M24 × 1.5
S	20	36	41	27	48	55	30	26.5	33.5	M30 × 2
S	25	46	46	36	54	59	34	30	35	M36 × 2
S	30	50	50	41	62	64	39	35.5	37.5	M42 × 2
S	38	60	65	50	72	68	43	41	37	M52 × 2

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

O-ring male connector, unified

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

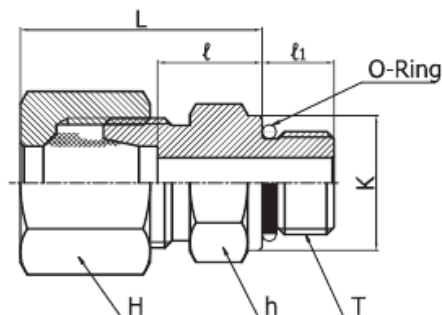

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	H	h	K	L	l1	l	T
L	8	17	17	14.4	25	9	10	7/16-20 UNF-2A
L	10	19	17	14.4	26	10	11	7/16-20 UNF-2A
L	12	22	19	17.6	26	10	11	9/16-18 UNF-2A
L	12	22	24	22.3	28	11	13	3/4-16 UNF-2A
L	12	22	27	25.5	29	12.7	14.3	7/8-14 UNF-2A
L	15	27	24	22.3	29	11	14	3/4-16 UNF-2A
L	15	27	27	25.5	30	12.7	15.5	7/8-14 UNF-2A
L	18	32	27	22.3	31	11	14.5	3/4-16 UNF-2A
L	18	32	27	25.5	31	12.7	14.8	7/8-14 UNF-2A
L	22	36	32	25.5	33	12.7	16.8	7/8-14 UNF-2A
L	22	36	32	31.9	33	15	16.5	1 1/16-12 UN-2A
L	22	36	41	38.2	34	15	17.5	1 5/16-12 UN-2A
L	28	41	41	31.9	34	15	17.5	1 1/16-12 UN-2A
L	28	41	41	38.2	34	15	17.5	1 5/16-12 UN-2A
L	35	50	46	38.2	39	15	17.5	1 5/16-12 UN-2A
L	35	50	50	47.7	39	15	17.5	1 5/8-12 UN-2A
L	42	60	55	47.7	42	15	19	1 5/8-12 UN-2A
S	8	19	17	16	30	9	15	7/16-20 UNF-2A
S	10	22	19	17.6	31	10	14.5	9/16-18 UNF-2A
S	12	24	22	17.6	31	10	14.5	9/16-18 UNF-2A
S	12	24	24	22.3	34	11	17.5	3/4-16 UNF-2A
S	16	30	24	22.3	34	11	15.5	3/4-16 UNF-2A
S	16	30	27	25.5	37	12.7	18.8	7/8-14 UNF-2A
S	20	36	32	22.3	42	11	20.5	3/4-16 UNF-2A
S	20	36	32	25.5	42	12.7	20.8	7/8-14 UNF-2A
S	20	36	32	31.9	42	15	20.5	1 1/16-12 UN-2A
S	25	46	36	31.9	47	15	23	1 1/16-12 UN-2A
S	38	60	55	47.7	57	15	26	1 5/8-12 UN-2A

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

O-ring male connector, metric

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

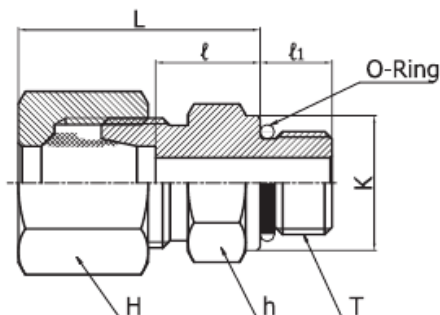

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	H	h	K	L	l1	l	T
L	6	14	14	14	23	9.5	8.5	M10 × 1
L	8	17	17	17	25	11	10	M12 × 1.5
L	10	19	19	19	26	11	11	M14 × 1.5
L	12	22	22	22	27	12.5	12.5	M16 × 1.5
L	15	27	24	24	29	14	13.5	M18 × 1.5
L	18	32	27	27	30	15	14.5	M22 × 1.5
L	22	36	32	32	33	18.5	16.5	M27 × 2
L	28	41	41	41	34	18.5	17.5	M33 × 2
L	35	50	50	50	39	19	17.5	M42 × 2
S	8	19	19	19	30	11	15	M14 × 1.5
S	10	22	22	22	31	12.5	15	M16 × 1.5
S	12	24	24	24	33	14	17	M18 × 1.5
S	16	30	27	27	37	15	18.5	M22 × 1.5
S	20	36	32	32	42	18.5	20.5	M27 × 2
S	25	46	41	41	47	18.5	23	M33 × 2
S	30	50	50	50	50	19	23.5	M42 × 2

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

BSP parallel/tapered male connector, part 1

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

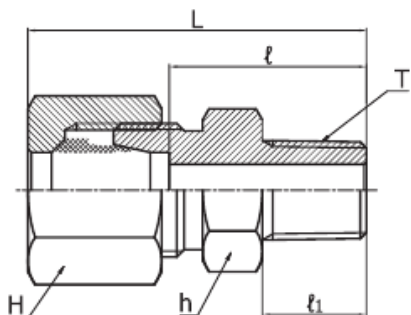

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	H	h	K	L	I	I1	T
LL	4	10	11	-	26	16	8	PT 1/8
LL	6	12	11	-	26	14.5	8	PT 1/8
LL	8	14	12	-	28	16.5	8	PT 1/8
LL	8	14	14	-	32	20.5	12	PT 1/4
LL	10	17	14	-	32	20.5	12	PT 1/4
LL	12	19	17	-	32	20	12	PT 1/4
LL	12	19	17	-	32	20	12	PT 3/8
L	6	14	14	14	23	8.5	8	PF 1/8
L	6	14	12	-	30	15	8	PT 1/8
L	6	14	19	18	25	10	12	PF 1/4
L	6	14	22	22	26	11.5	12	PF 3/8
L	6	14	27	26	27	12	14	PF 1/2
L	8	17	19	18	25	10	12	PF 1/4
L	8	17	14	14	23	8.5	8	PF 1/8
L	8	17	17	-	35	20	12	PT 1/4
L	8	17	22	22	26	11.5	12	PF 3/8
L	8	17	27	26	27	12	14	PF 1/2
L	10	19	19	18	26	11	12	PF 1/4
L	10	19	17	-	36	21	12	PT 1/4

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

BSP parallel/tapered male connector, part 1 - continued

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

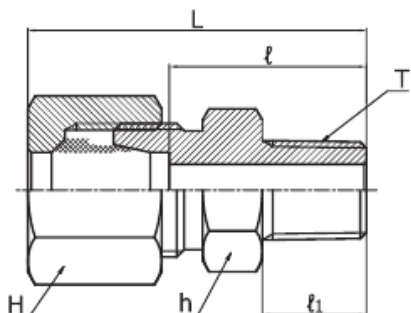

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	H	h	K	L	I	I1	T
L	10	19	22	22	27	12.5	12	PF 3/8
L	10	19	27	26	28	13	14	PF 1/2
L	12	22	22	22	27	12.5	12	PF 3/8
L	12	22	19	18	27	12	12	PF 1/4
L	12	22	19	-	37	22	12	PT 1/4
L	12	22	19	-	37	22	12	PT 3/8
L	12	22	27	26	28	13	14	PF 1/2
L	12	22	24	-	39	24	14	PT 1/2
L	12	22	32	32	29	14	16	PF 3/4
L	15	27	27	26	29	14	14	PF 1/2
L	15	27	24	22	29	13.5	12	PF 3/8
L	15	27	24	-	38	23	12	PT 3/8
L	15	27	24	-	40	25	14	PT 1/2
L	15	27	32	32	30	15	16	PF 3/4
L	18	32	27	26	31	14.5	14	PF 1/2
L	18	32	27	22	29.5	14	12	PF 3/8
L	18	32	27	-	41	25.5	14	PT 1/2
L	18	32	32	32	30	14.5	16	PF 3/4

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

BSP parallel/tapered male connector, part 2

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

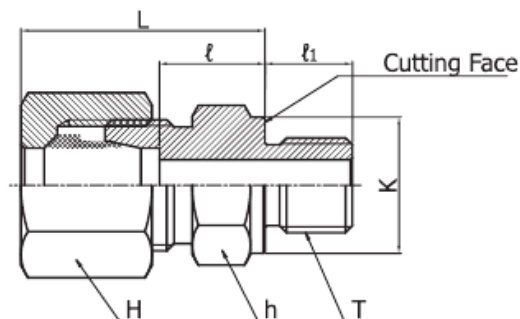

Match tube OD, series and every end connection.

Dimensions refer to the labelled drawing.

Drawing is not to scale.


Series	Tube OD	H	h	K	L	I	I1	T
L	22	36	32	32	33	16.5	16	PF 3/4
L	22	36	32	26	33	16.5	14	PF 1/2
L	28	41	41	39	34	17.5	18	PF 1
L	28	41	41	32	34	17.5	16	PF 3/4
L	35	50	50	49	39	17.5	20	PF 1 1/4
L	35	50	46	39	39	17.5	18	PF 1
L	42	60	55	55	42	19	22	PF 1 1/2
S	6	17	19	18	28	13	12	PF 1/4
S	6	17	27	26	33	18	14	PF 1/2
S	8	19	19	18	30	15	12	PF 1/4
S	8	19	22	22	30	15.5	12	PF 3/8
S	10	22	22	22	31	15	12	PF 3/8
S	10	22	19	18	31	14.5	12	PF 1/4
S	10	22	27	26	34	17.5	14	PF 1/2
S	12	24	22	22	33	17	12	PF 3/8
S	12	24	22	18	33	16.5	12	PF 1/4
S	12	24	27	26	34	17.5	14	PF 1/2
S	14	27	27	26	37	19	14	PF 1/2
S	14	27	24	22	36	18.5	12	PF 3/8
S	16	30	27	26	37	18.5	14	PF 1/2
S	16	30	27	22	36	18	12	PF 3/8
S	16	30	32	32	39	20.5	16	PF 3/4
S	20	36	32	32	42	20.5	16	PF 3/4
S	20	36	32	26	42	20.5	14	PF 1/2
S	25	46	41	39	47	23	18	PF 1
S	25	46	41	32	47	23	16	PF 3/4
S	30	50	50	49	50	23.5	20	PF 1 1/4
S	30	50	46	39	50	23.5	18	PF 1
S	38	60	55	55	57	26	22	PF 1 1/2
S	38	60	55	49	57	26	20	PF 1 1/4

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

Metric male connector

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

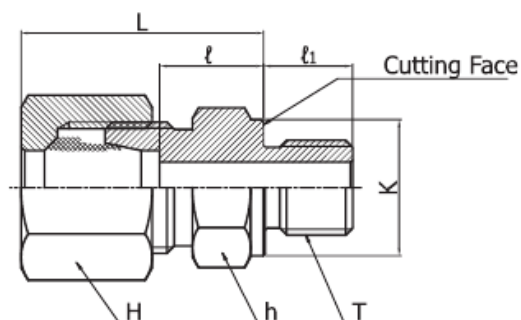

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	H	h	K	L	I	I1	T
LL	4	10	9	-	26	16	8	M 6 × 1Keg
LL	4	10	10	-	26	16	8	M 8 × 1Keg
LL	6	12	11	-	26	14.5	8	M 10 × 1Keg
LL	8	14	12	-	28	16.5	8	M 10 × 1Keg
L	6	14	14	14	23	8.5	8	M 10 × 1
L	8	17	17	17	25	10	12	M 12 × 1.5
L	8	17	24	23	26	11.5	12	M 18 × 1.5
L	10	19	19	19	26	11	12	M 14 × 1.5
L	10	19	22	21	27	12	12	M 16 × 1.5
L	10	19	24	23	27	12.5	12	M 18 × 1.5
L	10	19	27	27	29	14	14	M 22 × 1.5
L	12	22	19	19	26	11	12	M 14 × 1.5
L	12	22	22	21	27	12.5	12	M 16 × 1.5
L	12	22	24	23	27	12.5	12	M 18 × 1.5
L	12	22	27	27	29	14	14	M 22 × 1.5
L	15	27	24	21	28	13	12	M 16 × 1.5
L	15	27	24	23	29	13.5	12	M 18 × 1.5
L	15	27	27	27	30	15	14	M 22 × 1.5
L	18	32	27	23	30	14	12	M 18 × 1.5

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

Metric male connector - continued

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

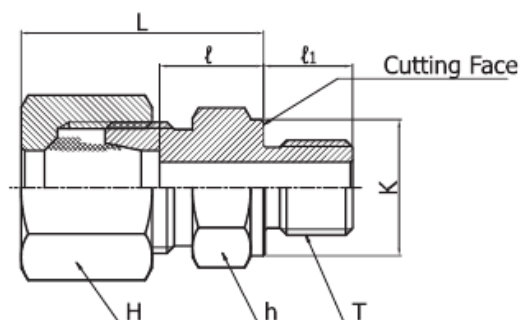

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	H	h	K	L	I	I1	T
L	18	32	27	27	31	14.5	14	M 22 × 1.5
L	22	36	32	27	33	16.5	14	M 22 × 1.5
L	22	36	32	31	33	16.5	16	M 26 × 1.5
L	28	41	41	39	34	17.5	18	M 33 × 2
L	35	50	50	49	39	17.5	20	M 42 × 2
L	42	60	55	55	42	19	22	M 48 × 2
S	6	17	17	17	28	13	12	M 12 × 1.5
S	8	19	19	19	30	15	12	M 14 × 1.5
S	10	22	22	21	31	15	12	M 16 × 1.5
S	12	24	24	23	33	17	12	M 18 × 1.5
S	12	24	27	27	34	17.5	14	M 22 × 1.5
S	14	27	27	25	37	19	14	M 20 × 1.5
S	16	30	27	23	36	18	12	M 18 × 1.5
S	16	30	27	27	37	18.5	14	M 22 × 1.5
S	20	36	32	32	42	20.5	16	M 27 × 2
S	25	46	41	39	47	23	18	M 33 × 2
S	30	50	50	49	50	23.5	20	M 42 × 2
S	38	60	55	55	57	26	22	M 48 × 2

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

BSPP ED-seal male connector

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

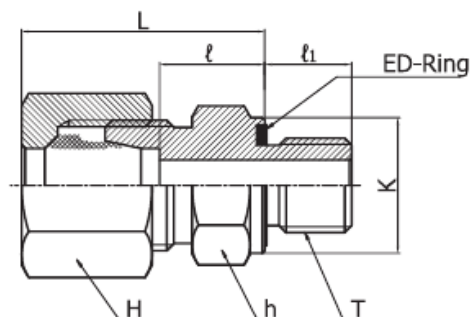

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	H	h	K	L	I	I1	T
L	6	14	14	14	23	8.5	8	1/8
L	6	14	19	19	25	10	12	1/4
L	8	17	14	14	24	9.5	8	1/8
L	8	17	19	19	25	10	12	1/4
L	8	17	22	22	26	11.5	12	3/8
L	10	19	19	19	26	11	12	1/4
L	10	19	22	22	27	12.5	12	3/8
L	10	19	27	27	28	13	14	1/2
L	12	22	19	19	27	12	12	1/4
L	12	22	22	22	27	12.5	12	3/8
L	12	22	27	27	28	13	14	1/2
L	15	27	24	22	29	13.5	12	3/8
L	15	27	27	27	29	14	14	1/2
L	18	32	27	27	31	14.5	14	1/2
L	18	32	32	32	31	14.5	16	3/4
L	22	36	32	32	33	16.5	16	3/4
L	28	41	41	40	34	17.5	18	1
L	35	50	50	50	39	17.5	20	1 1/4
L	42	60	55	55	42	19	22	1 1/2

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

BSPP ED-seal male connector - continued

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

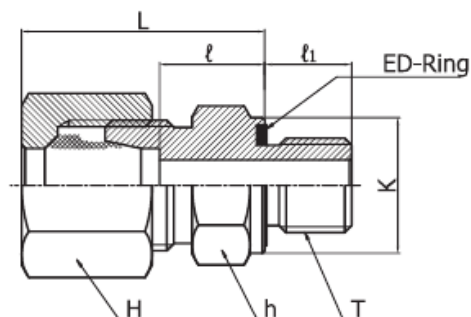

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	H	h	K	L	I	I1	T
S	6	17	19	19	28	13	12	1/4
S	8	19	19	19	30	15	12	1/4
S	8	19	22	22	30	15.5	12	3/8
S	10	22	19	19	31	14.5	12	1/4
S	10	22	22	22	31	15	12	3/8
S	10	22	27	27	34	17.5	14	1/2
S	12	24	22	19	33	16.5	12	1/4
S	12	24	22	22	33	17	12	3/8
S	12	24	27	32	34	17.5	14	1/2
S	14	27	27	27	37	19	14	1/2
S	16	30	27	22	36	18	12	3/8
S	16	30	27	27	37	18.5	14	1/2
S	16	30	32	27	39	20.5	16	3/4
S	20	36	32	32	42	20.5	16	3/4
S	25	46	41	27	47	23	14	1/2
S	25	46	41	32	47	23	16	3/4
S	25	46	41	40	47	23	18	1
S	30	50	50	50	50	23.5	20	1 1/4
S	38	60	55	55	57	26	22	1 1/2

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

Metric ED-seal male connector

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

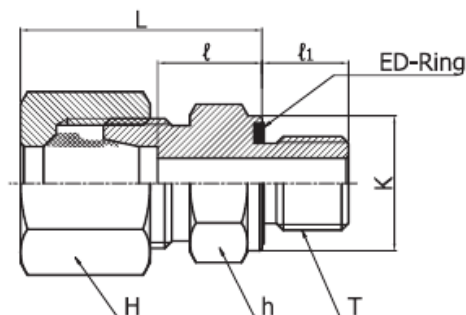

Match tube OD, series and every end connection.

Dimensions refer to the labelled drawing.

Drawing is not to scale.


Series	Tube OD	H	h	K	L	I	I1	T
L	6	14	14	14	23	8.5	8	M 10 × 1
L	10	19	19	19	26	11	12	M 14 × 1.5
L	12	22	22	22	27	12.5	12	M 16 × 1.5
L	12	22	24	24	27	12.5	12	M 18 × 1.5
L	12	22	27	27	29	14	14	M 22 × 1.5
L	15	27	24	24	29	13.5	12	M 18 × 1.5
L	15	27	27	27	30	15	14	M 22 × 1.5
L	18	32	27	27	31	14.5	14	M 22 × 1.5
L	22	36	32	32	33	16.5	16	M 26 × 1.5
L	28	41	41	40	34	17.5	18	M 33 × 2
L	35	50	50	50	39	17.5	20	M 42 × 2
L	42	60	55	55	42	19	22	M 48 × 2
S	6	17	17	17	28	13	12	M 12 × 1.5
S	8	19	19	19	30	15	12	M 14 × 1.5
S	10	22	22	22	31	15	12	M 16 × 1.5
S	12	24	24	24	33	17	12	M 18 × 1.5
S	14	27	27	26	37	19	14	M 20 × 1.5
S	16	30	27	27	37	18.5	14	M 22 × 1.5
S	20	36	32	32	42	20.5	16	M 27 × 2
S	25	46	41	40	47	23	18	M 33 × 2
S	30	50	50	50	50	23.5	20	M 42 × 2
S	38	60	55	55	57	26	22	M 48 × 2

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

NPT male connector

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

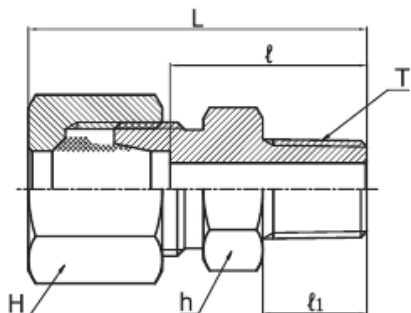

Match tube OD, series and every end connection.

Dimensions refer to the labelled drawing.

Drawing is not to scale.


Series	Tube OD	H	h	L	l	l1	T
LL	4	10	11	28	18.5	9.9	1/8 - 27
LL	6	12	11	28	16.5	9.9	1/8 - 27
LL	8	14	12	30	18.5	9.9	1/8 - 27
L	6	14	12	32	17	9.9	1/8 - 27
L	6	14	17	38	23	14.2	1/4 - 18
L	8	17	17	38	23	14.2	1/4 - 18
L	10	19	17	39	24	14.2	1/4 - 18
L	10	19	19	40	25	14.2	3/8 - 18
L	12	22	19	40	25	14.2	1/4 - 18
L	12	22	19	40	25	14.2	3/8 - 18
L	12	22	22	45	30	19.1	1/2 - 14
L	15	27	24	46	31	19.1	1/2 - 14
L	18	32	27	48	31.5	19.1	1/2 - 14
L	22	36	32	50	33.5	19.1	3/4 - 14
L	28	41	41	56	39.5	23.9	1 - 11.5
L	35	50	46	62	40.5	23.9	1 1/4 - 11.5
L	42	60	55	65	42	25.4	1 1/2 - 11.5
S	6	17	17	43	28	14.2	1/4 - 18
S	8	19	17	43	28	14.2	1/4 - 18
S	10	22	19	44	27.5	14.2	1/4 - 18
S	10	22	19	44	27.5	14.2	3/8 - 18
S	12	24	22	46	29.5	14.2	1/4 - 18
S	12	24	22	46	29.5	14.2	3/8 - 18
S	14	27	24	54	36	19.1	1/2 - 14
S	16	30	27	54	35.5	19.1	1/2 - 14
S	20	36	32	59	37.5	19.1	3/4 - 14
S	25	46	41	69	45	23.9	1 - 11.5
S	30	50	46	73	46.5	23.9	1 1/4 - 11.5
S	38	60	55	80	49	25.4	1 1/2 - 11.5

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

BSPP female connector

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.



Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	d	h	L	l	l1	T
L	6	4	14	34	19	12	1/8
L	8	6	17	39	24	17	1/4
L	8	6	17	40	25	17	3/8
L	8	6	17	44	29	20	1/2
L	10	8	19	40	25	17	1/4
L	10	8	19	41	26	17	3/8
L	10	8	19	45	30	20	1/2
L	12	10	22	41	26	17	3/8
L	12	10	22	45	30	20	1/2
L	15	12	27	46	31	20	1/2
L	18	15	32	47	30.5	20	1/2
L	22	19	36	52	35.5	22	3/4
L	28	24	41	55	38	24.5	1
L	35	30	50	63	41	26.5	1 1/4
L	42	36	60	65	42.5	28.5	1 1/2
S	6	4	17	41	26	17	1/4
S	8	5	19	41	26	17	1/4
S	10	7	22	43	26.5	17	3/8
S	12	8	24	43	26.5	17	3/8
S	14	10	27	50	32	20	1/2
S	16	12	30	50	31.5	20	1/2
S	20	16	36	56	34.5	22	3/4
S	25	20	41	62	37.5	24.5	1
S	30	25	55	69	42	26.5	1 1/4
S	38	32	60	74	43.5	28.5	1 1/2

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

Metric female connector

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.



Match tube OD, series and every end connection.

Dimensions refer to the labelled drawing.

Drawing is not to scale.


Series	Tube OD	d	H	h	L	l	l1	T
L	6	4	14	14	34	19.5	12.5	M 10 × 1
L	8	6	17	17	39	24	17	M 12 × 1.5
L	10	8	19	19	40	25	17	M 14 × 1.5
L	12	10	22	22	41	26	17	M 16 × 1.5
L	15	12	27	24	43	28	17	M 18 × 1.5
L	18	15	32	30	46	29.5	19	M 22 × 1.5
L	22	19	36	32	51	34.5	21	M 26 × 1.5
L	28	24	41	41	54	37.5	24	M 33 × 2
L	35	30	50	55	62	40.5	26	M 42 × 2
L	42	36	60	60	65	42	28	M 48 × 2
S	6	4	17	17	41	26	17	M 12 × 1.5
S	8	5	19	17	41	26	17	M 14 × 1.5
S	10	7	22	22	43	26.5	17	M 16 × 1.5
S	12	8	24	24	44	27.5	17	M 18 × 1.5
S	14	10	27	27	49	31	19	M 20 × 1.5
S	16	12	30	30	49	30.5	19	M 22 × 1.5
S	20	16	36	36	56	34.5	22	M 27 × 2
S	25	20	46	41	61	37	24	M 33 × 2
S	30	25	50	55	68	41.5	26	M 42 × 2
S	38	32	60	60	74	43	28	M 48 × 2

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

Adjustable elbow with standpipe

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.



Match tube OD, series and every end connection.

Dimensions refer to the labelled drawing.

Drawing is not to scale.


Series	Tube OD	D	H	h	L	L1	I	T
L	6	6	14	12	27	26	12	M 12 × 1.5
L	8	8	17	12	29	27.5	14	M 14 × 1.5
L	10	10	19	14	30	29	15	M 16 × 1.5
L	12	12	22	17	32	29.5	17	M 18 × 1.5
L	15	15	27	19	36	32.5	21	M 22 × 1.5
L	18	18	32	24	40	35.5	23.5	M 26 × 1.5
L	22	22	36	27	44	38.5	27.5	M 30 × 2
L	28	28	41	36	47	41.5	30.5	M 36 × 2
L	35	35	50	41	56	51	34.5	M 45 × 2
L	42	42	60	50	63	56	40	M 52 × 2
S	6	6	17	12	31	27	16	M 14 × 1.5
S	8	8	19	14	32	27.5	17	M 16 × 1.5
S	10	10	22	17	34	30	17.5	M 18 × 1.5
S	12	12	24	17	38	31	21.5	M 20 × 1.5
S	14	14	27	19	40	35	22	M 22 × 1.5
S	16	16	30	24	43	36.5	24.5	M 24 × 1.5
S	20	20	36	27	48	44.5	26.5	M 30 × 2
S	25	25	46	36	54	50	30	M 36 × 2
S	30	30	50	41	62	55	35.5	M 42 × 2
S	38	38	60	50	72	63	41	M 52 × 2

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

Adjustable branch tee with standpipe

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

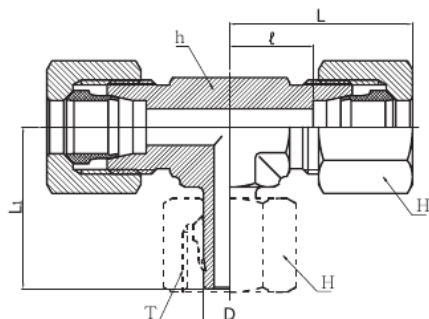

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	D	H	h	L	L1	I	T
L	6	6	14	12	27	26	12	M 12 × 1.5
L	8	8	17	12	29	27.5	14	M 14 × 1.5
L	10	10	19	14	30	29	15	M 16 × 1.5
L	12	12	22	17	32	29.5	17	M 18 × 1.5
L	15	15	27	19	36	32.5	21	M 22 × 1.5
L	18	18	32	24	40	35.5	23.5	M 26 × 1.5
L	22	22	36	27	44	38.5	27.5	M 30 × 2
L	28	28	41	36	47	41.5	30.5	M 36 × 2
L	35	35	50	41	56	51	34.5	M 45 × 2
L	42	42	60	50	63	56	40	M 52 × 2
S	6	6	17	12	31	27	16	M 14 × 1.5
S	8	8	19	14	32	27.5	17	M 16 × 1.5
S	10	10	22	17	34	30	17.5	M 18 × 1.5
S	12	12	24	17	38	31	21.5	M 20 × 1.5
S	14	14	27	19	40	35	22	M 22 × 1.5
S	16	16	30	24	43	36.5	24.5	M 24 × 1.5
S	20	20	36	27	48	44.5	26.5	M 30 × 2
S	25	25	46	36	54	50	30	M 36 × 2
S	30	30	50	41	62	55	35.5	M 42 × 2
S	38	38	60	50	72	63	41	M 52 × 2

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

Adjustable run tee with standpipe

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

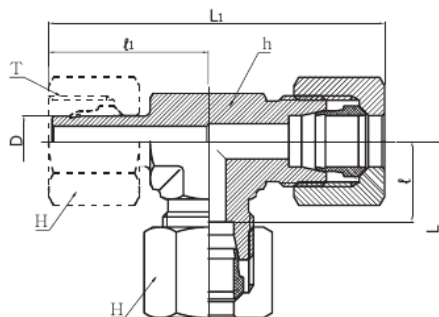

Match tube OD, series and every end connection.

Dimensions refer to the labelled drawing.

Drawing is not to scale.


Series	Tube OD	D	h	H	L	L1	I	I1	T
L	6	6	12	14	27	53	12	26	M 12 × 1.5
L	8	8	12	17	29	56	14	27.5	M 14 × 1.5
L	10	10	14	19	30	59	15	29	M 16 × 1.5
L	12	12	17	22	32	62	17	29.5	M 18 × 1.5
L	15	15	19	27	36	69	21	32.5	M 22 × 1.5
L	18	18	24	32	40	75	23.5	35.5	M 26 × 1.5
L	22	22	27	36	44	83	27.5	38.5	M 30 × 2
L	28	28	36	41	47	91	30.5	41.5	M 36 × 2
L	35	35	41	50	56	111	34.5	51	M 45 × 2
L	42	42	50	60	63	123	40	56	M 52 × 2
S	6	6	12	17	31	58	16	27	M 14 × 1.5
S	8	8	14	19	32	61	17	27.5	M 16 × 1.5
S	10	10	17	22	34	66	17.5	30	M 18 × 1.5
S	12	12	17	24	38	71	21.5	31	M 20 × 1.5
S	14	14	19	27	40	75	22	35	M 22 × 1.5
S	16	16	24	30	43	79	24.5	36.5	M 24 × 1.5
S	20	20	27	36	48	93	26.5	44.5	M 30 × 2
S	25	25	36	46	54	105	30	50	M 36 × 2
S	30	30	41	50	62	119	35.5	55	M 42 × 2
S	38	38	50	60	72	138	41	63	M 52 × 2

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

Swivel adjustable elbow with cone

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

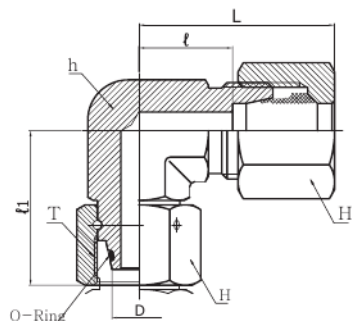

Match tube OD, series and every end connection.

Dimensions refer to the labelled drawing.

Drawing is not to scale.


Series	Tube OD	H	h	L	l	l1	T
L	6	14	12	27	12	26	M 12 × 1.5
L	8	17	12	29	14	27.5	M 14 × 1.5
L	10	19	14	30	15	29	M 16 × 1.5
L	12	22	17	32	17	29.5	M 18 × 1.5
L	15	27	19	36	21	32.5	M 22 × 1.5
L	18	32	24	40	23.5	35.5	M 26 × 1.5
L	22	36	27	44	27.5	38.5	M 30 × 2
L	28	41	36	47	30.5	41.5	M 36 × 2
L	35	50	41	56	34.5	51	M 45 × 2
L	42	60	50	63	40	56	M 52 × 2
S	6	17	12	31	16	27	M 14 × 1.5
S	8	19	14	32	17	27.5	M 16 × 1.5
S	10	22	17	34	17.5	30	M 18 × 1.5
S	12	24	17	38	21.5	31	M 20 × 1.5
S	14	27	19	40	22	35	M 22 × 1.5
S	16	30	24	43	24.5	36.5	M 24 × 1.5
S	20	36	27	48	26.5	44.5	M 30 × 2
S	25	46	36	54	30	50	M 36 × 2
S	30	50	41	62	35.5	55	M 42 × 2
S	38	60	50	72	41	63	M 52 × 2

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

Swivel adjustable branch tee with cone

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

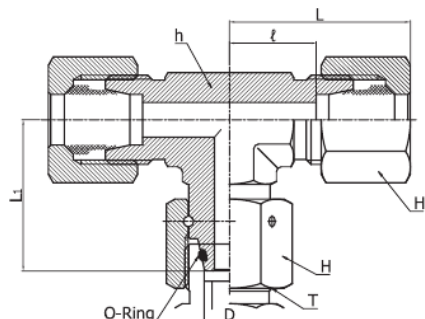

Match tube OD, series and every end connection.

Dimensions refer to the labelled drawing.

Drawing is not to scale.


Series	Tube OD	H	h	L	L1	I	T
L	6	14	12	27	26	12	M 12 × 1.5
L	8	17	12	29	27.5	14	M 14 × 1.5
L	10	19	14	30	29	15	M 16 × 1.5
L	12	22	17	32	29.5	17	M 18 × 1.5
L	15	27	19	36	32.5	21	M 22 × 1.5
L	18	32	24	40	35.5	23.5	M 26 × 1.5
L	22	36	27	44	38.5	27.5	M 30 × 2
L	28	41	36	47	41.5	30.5	M 36 × 2
L	35	50	41	56	51	34.5	M 45 × 2
L	42	60	50	63	56	40	M 52 × 2
S	6	17	12	31	27	16	M 14 × 1.5
S	8	19	14	32	27.5	17	M 16 × 1.5
S	10	22	17	34	30	17.5	M 18 × 1.5
S	12	24	17	38	31	21.5	M 20 × 1.5
S	14	27	19	40	35	22	M 22 × 1.5
S	16	30	24	43	36.5	24.5	M 24 × 1.5
S	20	36	27	48	44.5	26.5	M 30 × 2
S	25	46	36	54	50	30	M 36 × 2
S	30	50	41	62	55	35.5	M 42 × 2
S	38	60	50	72	63	41	M 52 × 2

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

Swivel adjustable run tee with cone

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

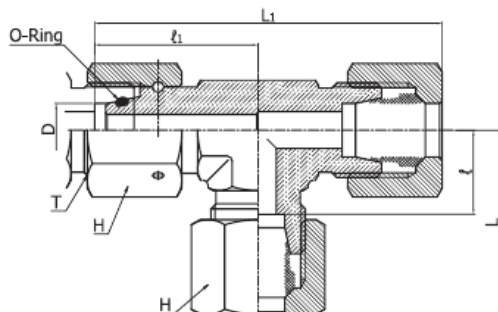

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	H	h	L	L1	I	I1	T
L	6	14	12	27	53	12	26	M 12 × 1.5
L	8	17	12	29	56	14	27.5	M 14 × 1.5
L	10	19	14	30	59	15	29	M 16 × 1.5
L	12	22	17	32	61	17	29.5	M 18 × 1.5
L	15	27	19	36	69	21	32.5	M 22 × 1.5
L	18	32	24	40	75	23.5	35.5	M 26 × 1.5
L	22	36	27	44	82	27.5	38.5	M 30 × 2
L	28	41	36	47	89	30.5	41.5	M 36 × 2
L	35	50	41	56	107	34.5	51	M 45 × 2
L	42	60	50	63	119	40	56	M 52 × 2
S	6	17	12	31	58	16	27	M 14 × 1.5
S	8	19	14	32	59	17	27.5	M 16 × 1.5
S	10	22	17	34	64	17.5	30	M 18 × 1.5
S	12	24	17	38	69	21.5	31	M 20 × 1.5
S	14	27	19	40	75	22	35	M 22 × 1.5
S	16	30	24	43	79	24.5	36.5	M 24 × 1.5
S	20	36	27	48	93	26.5	44.5	M 30 × 2
S	25	46	36	54	104	30	50	M 36 × 2
S	30	50	41	62	117	35.5	55	M 42 × 2
S	38	60	50	72	135	41	63	M 52 × 2

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

BSPP ED-seal adaptor

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

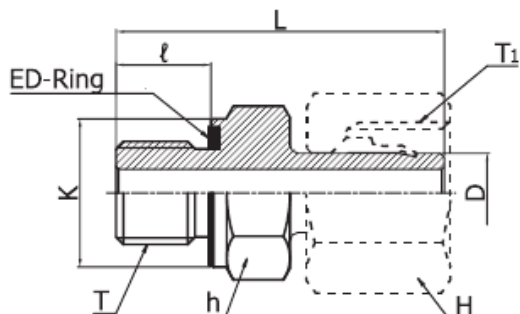

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	H	h	K	L	l	T	T1
L	6	14	14	14	24.5	8	1/8	M 12 × 1.5
L	8	17	19	19	29.5	12	1/4	M 14 × 1.5
L	10	19	19	19	27.5	12	1/4	M 16 × 1.5
L	12	22	22	22	34	12	3/8	M 18 × 1.5
L	15	27	27	27	32	14	1/2	M 22 × 1.5
L	18	32	27	27	31.5	14	1/2	M 26 × 1.5
L	22	36	32	32	32.5	16	3/4	M 30 × 2
L	28	41	41	40	35	18	1	M 36 × 2
L	35	50	50	50	42.5	20	1 1/4	M 45 × 2
L	42	60	55	55	46.5	22	1 1/2	M 52 × 2
S	6	17	19	19	27	12	1/4	M 14 × 1.5
S	8	19	19	19	29.5	12	1/4	M 16 × 1.5
S	10	22	22	22	32	12	3/8	M 18 × 1.5
S	12	24	22	22	34	12	3/8	M 20 × 1.5
S	12	24	27	27	34.5	14	1/2	M 20 × 1.5
S	14	27	27	27	36.5	14	1/2	M 22 × 1.5
S	16	30	32	32	39	16	3/4	M 24 × 1.5
S	20	36	32	32	43	16	3/4	M 30 × 2
S	25	46	41	40	48	18	1	M 36 × 2
S	30	50	50	50	51	20	1 1/4	M 42 × 2
S	38	60	55	55	60	22	1 1/2	M 52 × 2

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

Metric ED-seal adaptor

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

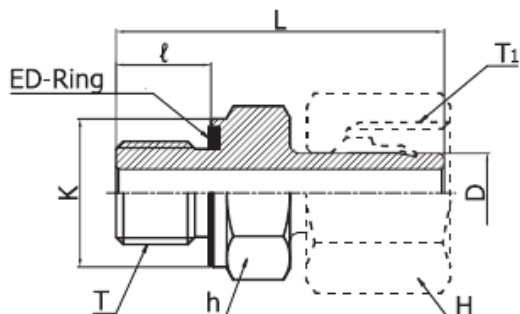

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	H	h	K	L	l	T	T1
L	6	14	14	14	24.5	8	M 10 × 1	M 12 × 1.5
L	8	17	17	17	26.5	12	M 12 × 1.5	M 14 × 1.5
L	10	19	19	19	27.5	12	M 14 × 1.5	M 16 × 1.5
L	12	22	22	22	30.5	12	M 16 × 1.5	M 18 × 1.5
L	15	27	24	24	31.5	14	M 18 × 1.5	M 22 × 1.5
L	18	32	27	27	31.5	14	M 22 × 1.5	M 26 × 1.5
L	22	36	32	32	32.5	16	M 26 × 1.5	M 30 × 2
L	28	41	41	40	35	18	M 33 × 2	M 36 × 2
L	35	50	50	50	42.5	20	M 42 × 2	M 45 × 2
L	42	60	55	55	46.5	22	M 48 × 2	M 52 × 2
S	6	17	17	17	27	12	M 12 × 1.5	M 14 × 1.5
S	8	19	19	19	29.5	12	M 14 × 1.5	M 16 × 1.5
S	10	22	22	22	32	12	M 16 × 1.5	M 18 × 1.5
S	12	24	24	24	34	12	M 18 × 1.5	M 20 × 1.5
S	14	27	27	27	36.5	14	M 20 × 1.5	M 22 × 1.5
S	16	30	27	27	37	14	M 22 × 1.5	M 24 × 1.5
S	20	36	32	32	43	16	M 27 × 2	M 30 × 2
S	25	46	41	40	48	18	M 33 × 2	M 36 × 2
S	30	50	50	50	51	20	M 42 × 2	M 45 × 2
S	38	60	55	55	60	22	M 48 × 2	M 52 × 2

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

BSPP swivel adaptor

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

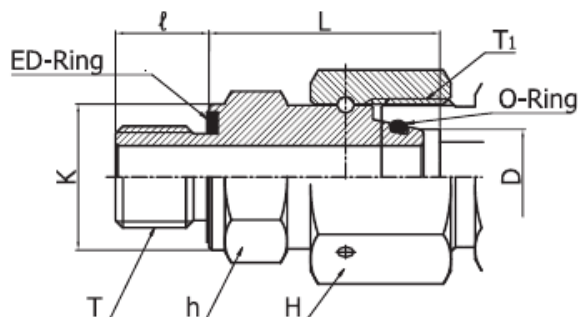

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	H	h	K	L	l	T	T1
L	6	14	14	14	24.5	8	1/8	M 12 × 1.5
L	8	17	19	19	29.5	12	1/4	M 14 × 1.5
L	10	19	19	19	27.5	12	1/4	M 16 × 1.5
L	12	22	22	22	34	12	3/8	M 18 × 1.5
L	15	27	27	27	32	14	1/2	M 22 × 1.5
L	18	32	27	27	31.5	14	1/2	M 26 × 1.5
L	22	36	32	32	32.5	16	3/4	M 30 × 2
L	28	41	41	40	35	18	1	M 36 × 2
L	35	50	50	50	42.5	20	1 1/4	M 45 × 2
L	42	60	55	55	46.5	22	1 1/2	M 52 × 2
S	6	17	19	19	27	12	1/4	M 14 × 1.5
S	8	19	19	19	29.5	12	1/4	M 16 × 1.5
S	10	22	22	22	32	12	3/8	M 18 × 1.5
S	12	24	22	22	34	12	3/8	M 20 × 1.5
S	14	27	27	27	36.5	14	1/2	M 22 × 1.5
S	16	30	27	27	37	14	1/2	M 24 × 1.5
S	20	36	32	32	43	16	3/4	M 30 × 2
S	25	46	41	40	48	18	1	M 36 × 2
S	30	50	50	50	51	20	1-1/4	M 42 × 2
S	38	60	55	55	60	22	1-1/2	M 52 × 2

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

Metric swivel adaptor

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

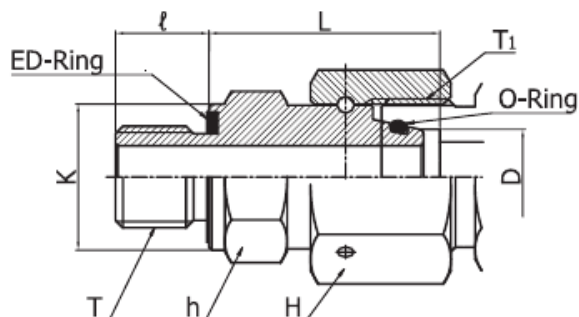

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	H	h	K	L	I	T	T1
L	6	14	14	14	24.5	8	M 10 × 1	M 12 × 1.5
L	8	17	19	17	26.5	12	M 12 × 1.5	M 14 × 1.5
L	10	19	19	19	27.5	12	M 14 × 1.5	M 16 × 1.5
L	12	22	22	22	30.5	12	M 16 × 1.5	M 18 × 1.5
L	15	27	24	24	31.5	14	M 18 × 1.5	M 22 × 1.5
L	18	32	27	27	31.5	14	M 22 × 1.5	M 26 × 1.5
L	22	36	32	32	32.5	16	M 26 × 1.5	M 30 × 2
L	28	41	41	40	35	18	M 33 × 2	M 36 × 2
L	35	50	50	50	42.5	20	M 42 × 2	M 45 × 2
L	42	60	55	55	46.5	22	M 48 × 2	M 52 × 2
S	6	17	17	17	27	12	M 12 × 1.5	M 14 × 1.5
S	8	19	19	19	29.5	12	M 14 × 1.5	M 16 × 1.5
S	10	22	22	22	32	12	M 16 × 1.5	M 18 × 1.5
S	12	24	24	24	34	12	M 18 × 1.5	M 20 × 1.5
S	14	27	27	26	36.5	14	M 20 × 1.5	M 22 × 1.5
S	16	30	27	27	37	14	M 22 × 1.5	M 24 × 1.5
S	20	36	32	32	43	16	M 27 × 2	M 30 × 2
S	25	46	41	40	48	18	M 33 × 2	M 36 × 2
S	38	60	55	55	60	22	M 48 × 2	M 52 × 2

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

Swivel union with cone

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

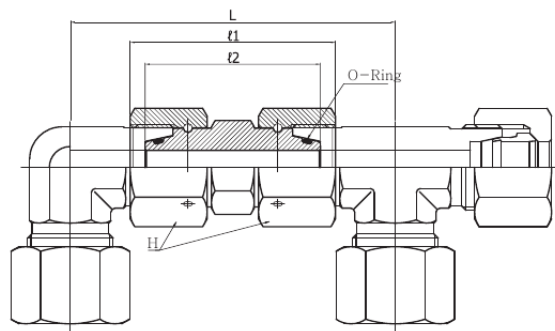

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	H	L	l1	l2
L	6	14	64	36	34
L	8	17	64	36	34
L	10	19	67	37	36
L	12	22	71	37	36
L	15	27	82	40	39
L	22	36	102	47	45
L	28	41	110	49	47
L	35	50	127	58	53
L	42	60	139	59	53
S	6	17	71	39	37
S	8	19	73	39	37
S	10	22	78	43	41
S	12	24	87	44	43
S	14	27	92	48	45
S	16	30	99	50	46
S	20	36	113	60	55
S	25	46	126	66	58
S	30	50	144	73	62
S	38	60	165	83	67

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

Pressure gauge connector

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.



Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	d	H	h	L	I	I1	I2	T
L	6	2.5	14	19	37	7.5	14.5	4.5	1/4
L	8	5.5	17	19	37	7.5	14.5	4.5	1/4
L	10	5.5	19	19	38	8.5	14.5	4.5	1/4
L	12	5.5	22	19	38	8.5	14.5	4.5	1/4
S	6	3.5	17	27	46	11	20	5	1/2
S	8	3.5	19	27	46	11	20	5	1/2
S	10	7.0	22	27	47	10.5	20	5	1/2
S	12	7.0	24	27	47	10.5	20	5	1/2

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

Tee test coupling

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.



Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	H	h	L	l	S
L	6	14	24	50	20.5	50
L	8	17	24	50	20.5	50
L	10	19	24	52	22.5	50
L	12	22	24	52	22.5	50
L	15	27	30	55	24.5	53
L	18	32	32	56	23.5	54
L	22	36	36	60	27.5	56
L	28	41	41	60	27.5	58
L	35	50	46	68	25.5	61
L	42	60	55	70	24.5	65
S	6	17	24	54	24.5	50
S	8	19	24	54	24.5	50
S	10	22	24	56	23.5	50
S	12	24	24	56	23.5	50
S	14	27	27	62	26.5	51
S	16	30	30	62	25.5	53
S	20	36	36	68	25.5	56
S	25	46	41	74	26.5	58
S	30	50	46	80	27.5	61
S	38	60	55	91	29	65

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

Test coupling

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.



Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	D3	h	i	Si	T
-	14	38	8	17	PF/ 1/8
-	18	36	10	19	PF/ 1/4
-	22	36	10	22	PF/ 3/8
-	26	26.7	14	27	PF/ 1/2
-	14	38	8	17	M 10 × 1
-	17	36	10	19	M 12 × 1.5
-	19	36	10	19	M 14 × 1.5
-	21	36	10	22	M 16 × 1.5

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

Welding connector

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

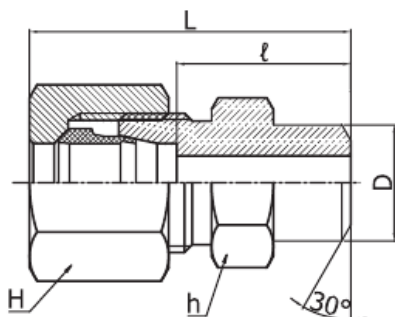

Match tube OD, series and every end connection.

Dimensions refer to the labelled drawing.

Drawing is not to scale.


Series	Tube OD	D	H	h	L	l
L	6	10	14	12	29	14
L	8	12	17	14	31	16
L	10	14	19	17	33	18
L	12	16	22	19	33	18
L	15	19	27	22	37	22
L	18	22	32	27	40	22.5
L	22	27	36	32	45	28.5
L	28	32	41	41	47	30.5
L	35	40	50	46	54	32.5
L	42	46	60	55	58	35
S	6	11	17	14	34	19
S	8	13	19	17	36	21
S	10	15	22	19	39	22.5
S	12	17	24	22	41	24.5
S	14	19	27	24	45	27
S	16	21	30	27	45	26.5
S	20	26	36	32	51	29.5
S	25	31	46	41	56	32
S	30	36	50	46	62	35.5
S	38	44	60	55	69	38

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

Blanking plug with O-ring

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

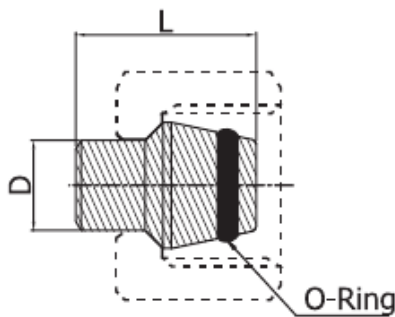

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	O-ring	L
L	15	12X2	20.5
L	18	15X2	22.5
L	22	20X2	25
L	28	26X2	25.5
L	35	32X2.5	30
L	42	38X2.5	30
L/S	6	4.5X1.5	18.5
L/S	8	6.5X1.5	18.5
L/S	10	8X1.5	20
L/S	12	10X1.5	20.5
S	14	11X2	22.5
S	16	13X2	23.5
S	20	16.3X2.4	28.5
S	25	20.3X2.4	29
S	30	25.3X2.4	30.5
S	38	33.3X2.4	33

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

Tube cap

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.



Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	H	h	L	l
L	6	14	12	22	7
L	8	17	14	23	8
L	10	19	17	24	9
L	12	22	19	25	10
L	15	27	24	26	11
L	18	32	27	28	11.5
L	22	36	32	30	13.5
L	28	41	41	31	14.5
L	35	50	46	36	14.5
L	42	60	55	39	16
S	6	17	14	26	11
S	8	19	17	28	13
S	10	22	19	29	12.5
S	12	24	22	31	14.5
S	14	27	24	34	16
S	16	30	27	34	15.5
S	20	36	32	39	17.5
S	25	46	41	44	20
S	30	50	46	47	20.5
S	38	60	55	54	23

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

Standpipe reducer, light

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

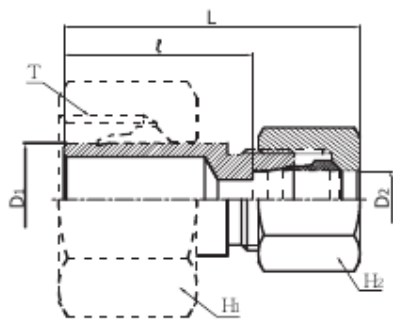

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	D1	D2	H1	H2	L	I	T
L	8	6	17	14	38	23.5	M 14 × 1.5
L	12	6	22	14	38	23.5	M 18 × 1.5
L	15	6	27	14	38	23.5	M 22 × 1.5
L	18	6	32	14	39	24.5	M 26 × 1.5
L	22	6	36	14	40	25.5	M 30 × 2
L	28	6	41	14	41	26.5	M 36 × 2
L	35	6	50	14	46	31.5	M 45 × 2
L	42	10	60	19	48	33.5	M 52 × 2

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

Standpipe reducer, heavy

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

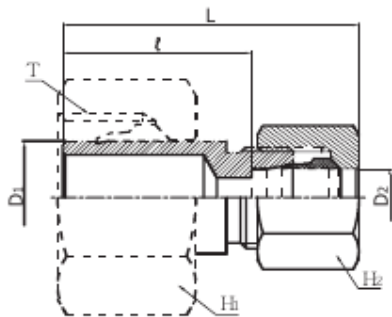

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	D1	D2	H1	H2	L	I	T
S	8	6	19	17	40	25	M 16 × 1.5
S	10	6	22	17	41	26	M 18 × 1.5
S	12	6	22	17	42	27	M 20 × 1.5
S	14	6	27	17	44	29	M 22 × 1.5
S	16	6	30	17	44	29	M 24 × 1.5
S	20	6	36	17	52	34	M 30 × 2
S	25	6	46	17	49	37	M 36 × 2
S	30	6	50	17	54	39	M 42 × 2
S	38	6	60	17	58	43	M 52 × 2

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

Reducer, light

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

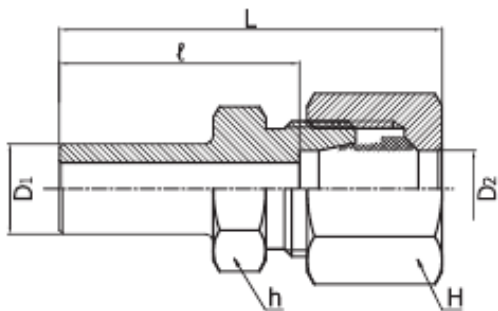

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	D1	D2	H	h	L	l
L	8	6	14	14	40	25.5
L	10	6	14	14	42	27.5
L	12	6	14	14	42	27.5
L	15	6	14	17	44	29
L	18	6	14	19	46	31
L	22	6	14	24	48	33
L	28	6	14	30	48	33
L	35	6	14	36	53	38.5
L	42	6	14	46	56	41

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

Reducer, heavy

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

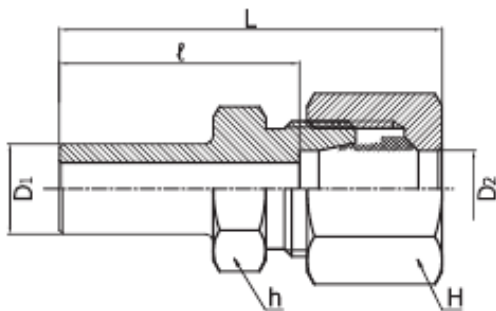

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	D1	D2	H	h	L	I
S	8	6	17	17	43	28
S	10	6	17	17	45	30.5
S	12	6	17	17	47	32.5
S	14	6	17	17	51	36.5
S	16	6	17	17	53	38.5
S	20	6	17	22	58	43
S	25	6	17	27	62	47.5
S	30	6	17	32	67	52
S	38	6	17	41	72	57

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

Swivel gauge adaptor

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.



Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	d	H	h	L	I1	I2	T
L	6	2.5	14	19	35.5	14.5	4.5	1/4
S	6	2.5	17	27	42.5	20	5	1/2
S	6	2.5	17	19	35.5	14.5	4.5	1/4

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

Gauge connector with standpipe

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.



Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	d	H	h	L	l1	l2	T
L	6	2.5	14	19	38	14.5	4.5	1/4
S	6	2.5	17	27	45	20	5	1/2

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

Welding connector with nipple

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

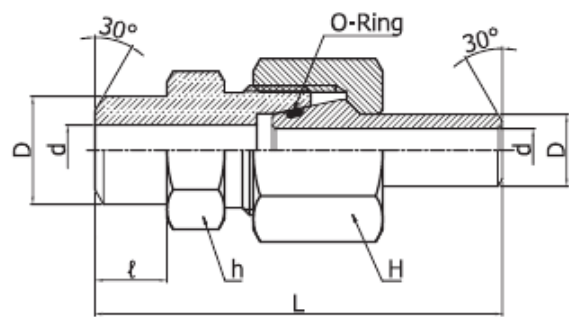

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	d	H	h	L	l
-	10	8	22	19	58	10
-	12	9	24	22	63	15
-	16	13	30	27	73.5	16.5
-	20	16	36	32	83.5	19
-	25	19	46	41	92.5	19.5
-	30	24	50	46	101.5	23
-	38	30	60	55	108	22

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

Welding nipple with O-ring

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

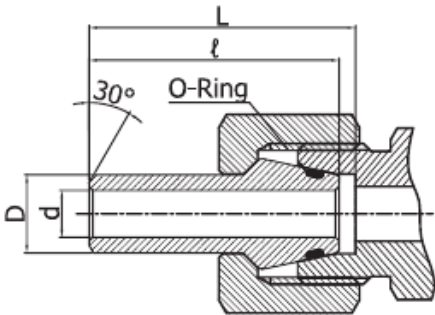

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	d	L	l
-	10	8	33.5	32.5
-	12	9	33.5	32.5
-	16	13	40.5	39
-	20	16	47	45
-	25	19	53	49.5
-	30	24	57	52
-	38	30	64	56.5

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

Reducing welding nipple

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.



Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.

Series	D1	D2	d1	d2	L1	L	l
-	10	6	3	5	34	33	12
-	10	8	4	-	34	33	12
-	12	8	4	6	34	33	14
-	12	10	7	-	34	33	14
-	16	12	7	-	41	39	15
-	20	12	7	-	47	45	17
-	20	16	10	-	47	45	17
-	25	16	10	-	53	50	20
-	25	20	12	-	53	50	20
-	30	16	12	-	57	52	22
-	30	20	15	-	57	52	22
-	30	25	19	-	57	52	22
-	38	16	12	-	64	57	26
-	38	20	15	-	64	57	26
-	38	25	19	-	64	57	26
-	38	30	22	-	64	57	26


A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE


Nut, cutting ring and tube-end dimensions

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.


Nut



Cutting Ring



Tube end Dimension




Series	Tube OD	DN	D	D1	d	H	L	M	I	I1
LL	4	3	4	5	3	10	11	M8 x 1	4	8
LL	6	4	6	7.5	4.5	12	11.5	M10 x 1	5.5	8
LL	8	6	8	9.5	6	14	12	M12 x 1	5.5	9
LL	10	8	10	11.5	8	17	12.5	M14 x 1	5.5	9
LL	12	10	12	13.5	10	19	13	M16 x 1	6	9
L	6	4	6	8.1	4	14	15	M12 x 1.5	7	10
L	8	6	8	10.1	6	17	15	M14 x 1.5	7	10
L	10	8	10	12.3	8	19	16	M16 x 1.5	7	11
L	12	10	12	14.3	10	22	16	M18 x 1.5	7	11
L	15	12	15	17.3	12	27	17.5	M22 x 1.5	7	12
L	18	16	18	20.3	15	32	18.5	M26 x 1.5	7.5	12
L	22	20	22	24.3	19	36	20.5	M30 x 2	7.5	14
L	28	25	28	30.3	24	41	21	M36 x 2	7.5	14
L	35	32	35	38	30	50	24	M45 x 2	10.5	16
L	42	40	42	45	36	60	24	M52 x 2	11	16
S	6	3	6	8.1	4	17	17	M14 x 1.5	7	12
S	8	4	8	10.1	5	19	17	M16 x 1.5	7	12
S	10	6	10	12.3	7	22	18	M18 x 1.5	7.5	12
S	12	8	12	14.3	8	24	18	M20 x 1.5	7.5	12
S	14	10	14	16.3	10	27	21	M22 x 1.5	8	14
S	16	12	16	18.3	12	30	21	M24 x 1.5	8.5	14
S	20	16	20	22.9	16	36	24.5	M30 x 2	10.5	16
S	25	20	25	27.9	20	46	27	M36 x 2	12	18
S	30	25	30	33	25	50	29	M42 x 2	13.5	20
S	38	32	38	41	32	60	32.5	M52 x 2	16	22

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

BSPP banjo fitting with profile seal

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

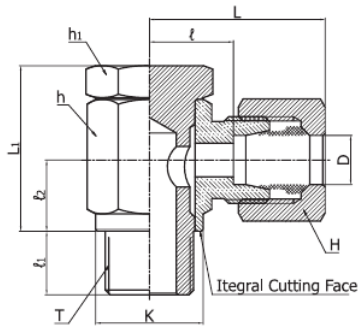

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	D	H	h	h1	L	L1	I	I1	I2	T
L	6	14.5	14	14	14	25	21	10.5	6	10	1/8
L	8	18.5	17	19	19	28	27	13	9	13	1/4
L	10	18.5	19	19	19	29	27	14	9	13	1/4
L	12	22.5	22	22	22	30	32	15.5	9	15	3/8
L	15	26.5	27	27	27	34	37.5	19	11	18	1/2
L	18	26	32	30	27	37	44	20.5	11	21.5	1/2
L	22	32	36	36	32	42	49	25.5	13	24	3/4
S	6	17	17	19	19	30	27	15	9	13	1/4
S	8	19	19	19	19	30	27	15	9	13	1/4
S	10	22	22	22	22	32	32	16	9	15	3/8
S	12	24	24	24	24	33	37	17	9	18	3/8
S	16	30	30	30	27	40	44	21.5	11	21.5	1/2
S	20	36	36	36	32	46	49	24.5	13	24	3/4

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

Metric banjo fitting with profile seal

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

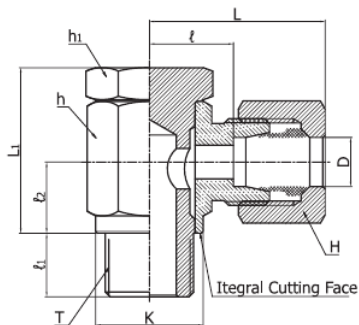

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	D	H	h	h1	L	L1	I	I1	I2	T
L	6	14.5	14	14	14	25	21.5	10.5	6	10	M 10 × 1
L	8	17.5	17	19	17	27	25	12	9	12	M 12 × 1.5
L	10	19.5	19	19	19	29	27	14	9	13	M 14 × 1.5
L	12	21.5	22	22	22	30	32	15.5	9	15	M 16 × 1.5
L	15	23.5	27	24	24	33	37.5	17.5	9	18	M 18 × 1.5
L	18	27	32	30	27	37	44	20.5	11	21.5	M 22 × 1.5
L	22	31	36	36	32	42	49	25.5	13	24	M 26 × 1.5
S	6	17.5	17	17	17	29	25	14	9	12	M 12 × 1.5
S	8	19.5	19	19	19	30	27	15	9	13	M 14 × 1.5
S	10	21.5	22	22	22	32	32	16	9	15	M 16 × 1.5
S	12	23.5	24	24	24	33	37	17	9	18	M 18 × 1.5
S	14	25.5	27	27	27	38	37	20	11	18	M 20 × 1.5
S	16	27	30	30	27	40	44	21.5	11	21.5	M 22 × 1.5
S	20	32	36	36	32	46	49	24.5	13	24	M 27 × 2

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

BSPP banjo fitting

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.



Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	D	H	h	h1	L	L1	I	I1	I2	t	T
L	6	14	14	17	17	27	24	12	8	10.5	2.5	1/8
L	8	18	17	22	19	29	30	14.5	12	14	3.0	1/4
L	10	18	19	22	19	30	30	15.5	12	14	3.0	1/4
L	12	22	22	27	24	33	36	18	12	16.5	3.0	3/8
L	15	26	27	32	30	37	45	21.5	14	21.5	4.5	1/2
L	18	26	32	32	30	37	45	21	14	21.5	4.5	1/2
L	22	32	36	41	36	44	53	27.5	16	24	3.5	3/4
L	35	49	50	60	55	58	76	36	20	35.5	3.5	1 1/4
L	42	55	60	70	60	63	87	40.5	22	40.5	3.5	1 1/2
S	6	18	17	22	19	31	30	16.5	12	14	3.0	1/4
S	8	18	19	22	19	31	30	16.5	12	14	3.0	1/4
S	10	22	22	27	24	35	36	18.5	12	16.5	3.0	3/8
S	12	22	24	27	24	35	36	18.5	12	16.5	3.0	3/8
S	16	26	30	32	30	40	45	22	14	21.5	4.5	1/2
S	20	32	36	41	36	48	53	26.5	16	24	3.5	3/4
S	25	39	46	50	46	56	66	31.5	18	30.5	3.5	1
S	30	49	50	60	55	64	76	37	20	34.5	3.5	1 1/4
S	38	55	60	70	60	72	87	41.5	22	40.5	3.5	1 1/2

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

Metric banjo fitting

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.



Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	D	H	h	h1	L	L1	I	I1	I2	t	T
L	6	14	14	17	17	27	24	12	8	10.5	2.5	M 10 × 1
L	8	17	17	22	19	29	30	14.5	12	14	3.0	M 12 × 1.5
L	10	19	19	22	19	30	30	15.5	12	14	3.0	M 14 × 1.5
L	12	21	22	27	24	33	36	18	12	16.5	3.0	M 16 × 1.5
L	15	23	27	30	27	36	39.5	20.5	12	18.5	3.0	M 18 × 1.5
L	18	27	32	32	30	37	45	21	14	21.5	4.5	M 22 × 1.5
L	22	31	36	41	36	44	53	27.5	16	24	3.5	M 26 × 1.5
L	28	39	41	50	46	49	66	32	18	30.5	3.5	M 33 × 2
L	35	49	50	60	55	58	76	36	20	35.5	3.5	M 42 × 2
L	42	55	60	70	60	63	87	40.5	22	40.5	3.5	M 48 × 2
S	6	17	17	22	19	31	30	16.5	12	14	3.0	M 12 × 1.5
S	8	19	19	22	19	31	30	16.5	12	14	3.0	M 14 × 1.5
S	10	21	22	27	24	35	36	18.5	12	16.5	3.0	M 16 × 1.5
S	12	23	24	30	27	36	39.5	20	12	18.5	3.0	M 18 × 1.5
S	16	27	30	32	30	40	45	22	14	21.5	4.5	M 22 × 1.5
S	20	32	36	41	36	48	53	26.5	16	24	3.5	M 27 × 2
S	25	39	46	50	46	56	66	31.5	18	30.5	3.5	M 33 × 2
S	30	49	50	60	55	64	76	37	20	35.5	3.5	M 42 × 2
S	38	55	60	70	60	72	87	41.5	22	40.5	3.5	M 48 × 2

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

BSPP banjo tee

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

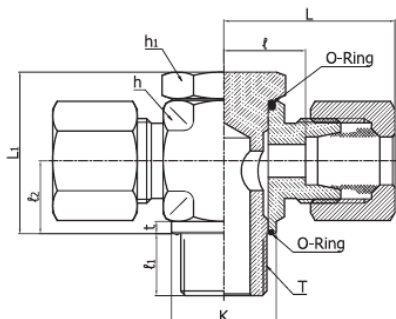

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	D	H	h	h1	L	L1	I	I1	I2	t	T
L	6	14	14	17	17	27	24	12	8	10.5	2.5	1/8
L	8	18	17	22	19	29	30	14.5	12	14	3.0	1/4
L	10	18	19	22	19	30	30	15.5	12	14	3.0	1/4
L	12	22	22	27	24	33	36	18	12	16.5	3.0	3/8
L	15	26	27	32	30	37	45	21.5	14	21.5	4.5	1/2
L	18	26	32	32	30	37	45	21	14	21.5	4.5	1/2
L	22	32	36	41	36	44	53	27.5	16	24	3.5	3/4
L	28	39	41	50	46	49	66	32	18	30.5	3.5	1
L	35	49	50	60	55	58	76	36	20	35.5	3.5	1 1/4
S	6	18	17	22	19	31	30	16.5	12	14	3.0	1/4
S	8	18	19	22	19	31	30	16.5	12	14	3.0	1/4
S	10	22	22	27	24	35	36	18.5	12	16.5	3.0	3/8
S	12	22	24	27	24	35	36	18.5	12	16.5	3.0	3/8
S	16	26	30	32	30	40	45	22	14	21.5	4.5	1/2
S	20	32	36	41	36	48	53	26.5	16	24	3.5	3/4
S	25	39	46	50	46	56	66	31.5	18	30.5	3.5	1
S	30	49	50	60	55	64	76	37	20	35.5	3.5	1 1/4
S	38	55	60	70	60	72	87	41.5	22	40.5	3.5	1 1/2

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

Metric banjo tee

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.

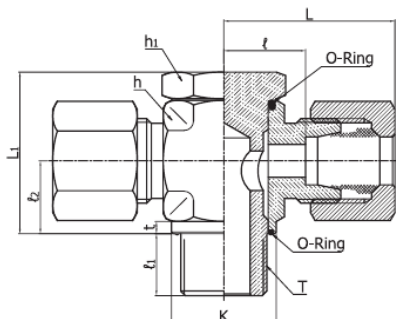

Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	Tube OD	D	H	h	h1	L	L1	I	I1	I2	t	T
L	6	14	14	17	17	27	24	12	8	10.5	2.5	M 10 × 1
L	8	17	17	22	19	29	30	14.5	12	14	3.0	M 12 × 1.5
L	10	19	19	22	19	30	30	15.5	12	14	3.0	M 14 × 1.5
L	12	21	22	27	24	33	36	18	12	16.5	3.0	M 16 × 1.5
L	15	23	27	30	27	36	39.5	20.5	12	18.5	3.0	M 18 × 1.5
L	18	27	32	32	30	37	45	21	14	21.5	4.5	M 22 × 1.5
L	22	31	36	41	36	44	53	27.5	16	24	3.5	M 26 × 1.5
L	28	39	41	50	46	49	66	32	18	30.5	3.5	M 33 × 2
L	35	49	50	60	55	58	76	36	20	35.5	3.5	M 42 × 2
L	42	55	60	70	60	63	87	40.5	22	40.5	3.5	M 48 × 2
S	6	17	17	22	19	31	30	16.5	12	14	3.0	M 12 × 1.5
S	8	19	19	22	19	31	30	16.5	12	14	3.0	M 14 × 1.5
S	10	21	22	27	24	35	36	18.5	12	16.5	3.0	M 16 × 1.5
S	12	23	24	30	27	36	39.5	20	12	18.5	3.0	M 18 × 1.5
S	16	27	30	32	30	40	45	22	14	21.5	4.5	M 22 × 1.5
S	20	32	36	41	36	48	53	26.5	16	24	3.5	M 27 × 2
S	25	39	46	50	46	56	66	31.5	18	30.5	3.5	M 33 × 2
S	30	49	50	60	55	64	76	37	20	35.5	3.5	M 42 × 2
S	38	55	60	70	60	72	87	41.5	22	40.5	3.5	M 48 × 2

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

BSPP male-female adaptor

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.



Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	H	K	L	I	I1	T	T1
-	22	22	22.5	12	8	3/8	1/8
-	27	26	24	14	8	1/2	1/8
-	27	26	24	14	12	1/2	1/4
-	32	32	26	16	12	3/4	1/4
-	32	32	26	16	12	3/4	3/8
-	41	39	29	18	12	1	1/4
-	41	39	29	18	12	1	3/8
-	41	39	29	18	14	1	1/2
-	50	49	32	20	14	1 1/4	1/2
-	50	49	32	20	16	1 1/4	3/4
-	55	55	36	22	14	1 1/2	1/2
-	55	55	36	22	16	1 1/2	3/4
-	55	55	36	22	18	1 1/2	1

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

BSPP male-female adaptor

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.



Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	D	H	K	L	I	I1	T	T1
-	4	19	14	31	8	17	1/8	1/4
-	4	24	14	32	8	17	1/8	3/8
-	5	19	18	28	12	12	1/4	1/8
-	5	24	18	36	12	17	1/4	3/8
-	5	30	18	40	12	20	1/4	1/2
-	5	36	18	43	12	22	1/4	3/4
-	8	22	22	36	12	17	3/8	1/4
-	8	30	22	41	12	20	3/8	1/2
-	8	36	22	44	12	22	3/8	3/4
-	12	27	26	36	14	17	1/2	3/8
-	12	36	26	46	14	22	1/2	3/4
-	12	41	26	49	14	24.5	1/2	1
-	10	55	26	53	14	26.5	1/2	1 1/4
-	16	32	32	41	16	20	3/4	1/2
-	16	41	32	51	16	24.5	3/4	1
-	16	55	32	55	16	26.5	3/4	1 1/4
-	16	60	32	57	16	28.5	3/4	1 1/2
-	20	41	39	47	18	22	1	3/4
-	20	55	39	57	18	26.5	1	1 1/4
-	20	60	39	59	18	28.5	1	1 1/2
-	25	50	49	52	20	24.5	1 1/4	1
-	25	60	49	60	20	28.5	1 1/4	1 1/2
-	32	55	55	58	22	26.5	1 1/2	1 1/4
-	40	70	68	62	24	28.5	2	1 1/2

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

BSPP male-female ED-seal adaptor

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.



Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	H	K	L	I	I1	T	T1
-	22	22	22.5	12	8	3/8	1/8
-	27	27	24	14	8	1/2	1/8
-	27	27	24	14	12	1/2	1/4
-	32	32	26	16	12	3/4	1/4
-	32	32	26	16	12	3/4	3/8
-	41	40	29	18	12	1	1/4
-	41	40	29	18	12	1	3/8
-	41	40	29	18	14	1	1/2
-	50	50	32	20	14	1 1/4	1/2
-	50	50	32	20	16	1 1/4	3/4
-	55	55	36	22	14	1 1/2	1/2
-	55	55	36	22	16	1 1/2	3/4
-	55	55	36	22	18	1 1/2	1

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

DIMENSIONAL REFERENCE

BSPP male-female ED-seal adaptor, second configuration

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.



Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	D	H	K	L	I	I1	T	T1
-	4	19	14	31	8	17	1/8	1/4
-	4	24	14	32	8	17	1/8	3/8
-	5	19	19	29	12	12	1/4	1/8
-	5	24	19	36	12	17	1/4	3/8
-	5	30	19	40	12	20	1/4	1/2
-	5	36	19	43	12	22	1/4	3/4
-	8	22	22	36	12	17	3/8	1/4
-	8	30	22	41	12	20	3/8	1/2
-	8	36	22	44	12	22	3/8	3/4
-	12	27	27	37	14	17	1/2	3/8
-	12	36	27	46	14	22	1/2	3/4
-	12	41	27	49	14	24.5	1/2	1
-	10	55	27	53	14	26.5	1/2	1 1/4
-	16	32	32	43	16	20	3/4	1/2
-	16	41	32	51	16	24.5	3/4	1
-	20	41	40	49	18	22	1	3/4
-	20	55	40	57	18	26.5	1	1 1/4
-	20	60	40	59	18	28.5	1	1 1/2
-	25	50	50	53	20	24.5	1 1/4	1
-	25	60	50	60	20	28.5	1 1/4	1 1/2
-	32	55	55	58	22	26.5	1 1/2	1 1/4
-	40	70	72	65	24	28.5	2	1 1/2

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

ED-seal port plugs, metric and BSPP

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.



Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.


Series	T metric	T BSPP	D	H	L	I
-	M 10 × 1	1/8	14	5	12	8
-	M 12 × 1.5	-	17	6	17	12
-	M 14 × 1.5	1/4	19	6	17	12
-	M 16 × 1.5	3/8	22	8	17	12
-	M 18 × 1.5	-	23.9	8	17	12
-	M 20 × 1.5	-	25.9	10	19	14
-	M 22 × 1.5	1/2	27	10	19	14
-	M 26 × 1.5	-	31.9	12	21	16
-	M 27 × 2	3/4	32	12	21	16
-	M 33 × 2	1	39.9	17	22.5	16
-	M 42 × 2	1 1/4	49.9	22	22.5	16
-	M 48 × 2	1 1/2	55	24	22.5	16

Selected unresolved or non-dimensional fields are omitted. Request the full confirmed drawing for your item.

DIMENSIONAL REFERENCE

Metric O-ring port plugs

Reference dimensions in mm. Threads are designated separately. Confirm the supplied item drawing.



Match tube OD, series and every end connection.
Dimensions refer to the labelled drawing.
Drawing is not to scale.

Series	T	D	H	L	I
-	M 10 × 1	13	5	14	10
-	M 12 × 1.5	17	6	16.5	11.5
-	M 14 × 1.5	19	6	16.5	11.5
-	M 16 × 1.5	21	6	18	13
-	M 18 × 1.5	23	8	19.5	14.5
-	M 22 × 1.5	27	10	20.5	15.5
-	M 26 × 1.5	31	12	21	16
-	M 27 × 2	32	12	24	19
-	M 33 × 2	38	17	25.5	19
-	M 42 × 2	48	22	26	19.5

A dash indicates an unspecified value. Do not infer missing data. This table does not establish a working-pressure rating.

F-LINE

Your connection, fully specified

Use this catalogue to identify the configuration and prepare a complete enquiry. The confirmed quotation, dimensional drawing and supplied assembly procedure establish the details of the item being ordered.

Send your enquiry

ram@fluidline.co.za

+27 11 312 9339

fluidline.co.za

- Attach a marked photograph or connection sketch.
- Include tube OD, wall thickness and series.
- State every port thread and sealing form.
- Provide material, medium, pressure and temperature.
- Confirm quantity and complete/body-only supply.

F-LINE DIN 2353 Hydraulic Systems & Fittings
Reference edition: October 2026